# DIGITUS® USB-A - Micro-B connection cable, 1.8m

**AK-300110-018-S**

**EAN 4016032282969**



**USB 2.0 connection cable, type A - micro B M/M, 1.8m, USB 2.0 conform, bl**

For connecting external USB end devices (with micro B socket, e.g. MP3 player, cell phone or external hard disk housing) to the USB host (e.g. PC, notebook or USB hub). Transfer rate up to 480 Mbps (high-speed).

**Enables reliable and fast connection of external USB devices to the PC, even over longer distances.**

**Attributes**

- Asortiman: USB kabeli
- AWG: 28
- Feritni filtar: nema
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: USB A, utikač
- Konektor 2: Micro USB B, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- USB sukladnost: USB 2,0
- Duljina: 1.8 m
- oklop: dvostruki oklop

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 300 | 13.28 | 25.00 | 45.00 | 32.00 | 36,000.00 |
| **Packaging Unit Inside** | 10 | 0.44 | 23.00 | 40.00 | 5.00 | 4,600.00 |
| **Packaging Unit Single** | 1 | 0.04 | 21.00 | 11.50 | 0.50 | 120.75 |
| **Net single without Packaging** | 1 | 0.04 | 11.00 | 10.50 | 1.50 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**




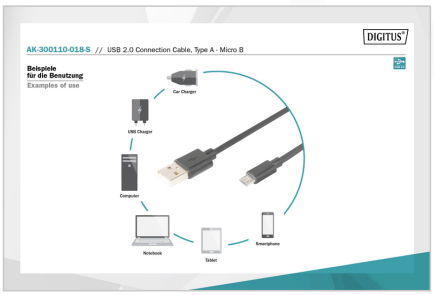







**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com