

DIGITUS® USB-C Charger, 2-port, 65W GaN

DA-10063

EAN 4016032485803



USB-C Mini charger, 2-Port, 65W 2x USB-C, 45W+20W, white

The Dual Port Charging Adapter from DIGITUS® is a powerful travel charger with a maximum power output of 65 W. Equipped with 2 C connections, the total output supports up to 65 W and can thus charge 2 devices (45W + 20W) simultaneously. Compatible with multiple protocols (with PPS function, supports Samsung S20, S20+, S10, S10+, Note10 and other tablets and smartphones). The integrated short circuit, surge and excess current protection provides added security. Furthermore, the integrated excess heat protection prevents potential overloads and damages to the charger or connected devices.

High-performance GaN charging adapter with an output of up to 65 W for USB-C devices of all kinds

- Type: Charging device/power adapter
- Connection: 2x USB-C
- Compatible with smartphones with 65W charging adapter, e.g. from Apple, XIAOMI, Google, Samsung S20, S20+, S10, S10+, Note10 and tablets




- Supports Power Delivery 3.0 and PPS function with 65W charging capacity
- Input voltage: 100 - 240 V AC, 50/60 Hz
- "Output voltage: USB-C1/C2: PD 65W (PD: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A), PPS: 3.3V-21V/3.25A)"
- "Output voltage: USB-C1+C2: C1: PD 45W (PD: 5V/3A, 9V/3A, 12V/3A, 20V/2.25A), PPS: 3.3 - 16V/3A C2: PD 20W (5V/3A, 9V/2.22A) PPS: 3.3-5.9V/3A, 3.3V-11V/2.2A, 20W Max"
- Surge protection / excess current protection / overload protection / short circuit protection
- Protection against overheating with automatic switch-off and recovery (auto-recovery)
- Dimensions: L 38 x W 40.5 x H 85 mm
- Color: White
- Weight: 122 g

Package contents

- 1x USB-C Mini Charging Adapter
- QIG (Quick Installation Guide)

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	50	8.50	27.00	27.00	37.00	26,973.00
Packaging Unit Inside	1	0.17	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.17	5.00	12.00	7.00	420.00
Net single without Packaging	1	0.12	3.80	4.10	4.40	0.00

More images:

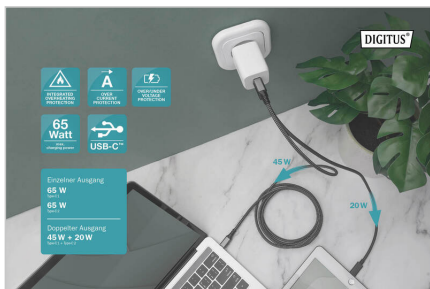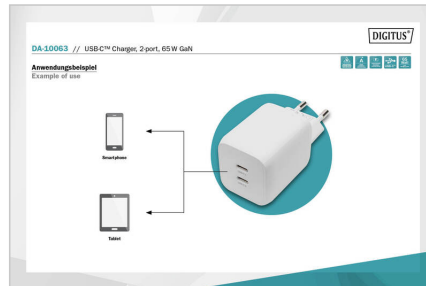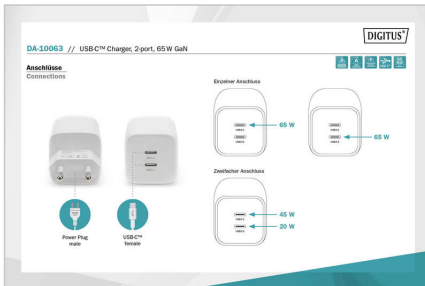

Safety notes

- Utilize os adaptadores de carregamento ou as fontes de alimentação de acordo com as instruções do manual de utilização, para garantir um desempenho ideal.
- Ligue o adaptador de carregamento a uma tomada de fácil acesso, com uma tensão compreendida entre 100 e 240 V CA.
- Desligue o adaptador de carregamento da tomada após a utilização.
- Não utilize o adaptador de carregamento com aparelhos eletrônicos que não estejam em conformidade com as especificações do adaptador de carregamento.
- Não exponha o aparelho à chuva, à humidade, a vapores ou a líquidos.
- Não introduza objetos no aparelho.
- Não tente reparar o aparelho por conta própria nem abrir a caixa. Corre o risco de sofrer um choque elétrico!
- Assegure uma ventilação adequada para evitar danos causados pelo superaquecimento.
- O pó, a humidade, os vapores, bem como produtos de limpeza ou solventes fortes, podem causar danos no aparelho.
- Antes de limpar o aparelho, desligue-o da rede elétrica e dos aparelhos ligados ao mesmo.
- Limpe o aparelho com um pano sem pó.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com