

DIGITUS® USB 3.0 Hub 4-Port, Industrial Line

DA-70257

EAN 4016032490470



USB 3.0 HUB, 4 Port, Industrial, Metal 15-kV ESD, Table, Wall, DIN Rail mount

The DIGITUS® Industrial USB 3.0 Hub is ideal for industrial applications due to its metal housing. It can be mounted on the wall or on a carrier rail and is connected to a computer, notebook or server with the included USB 3.0 cable. It supports USB 3.0 superspeed with a data transfer rate of up to 5 Gbit/s, at the same time the hub is downward compatible to USB 2.0 and USB 1.1. The hub can be powered via a two-wire terminal block connector (+9V to 24V). Optionally, an external power supply can be connected to the DC jack.

Expands a computer with USB A port with 4 additional USB A super-speed ports.

- USB 3.0 metal HUB with four downstream ports
- Battery Charging Specification BC1.2 (SDP), maximum 18 W (3.6 A @ 5 V)
- Power supply: +9 V to +24 V DC via terminal block or DC jack (Dimensions: (OD) 5.50mm x (ID) 2.0mm (L) x 10mm)
- Automatic detection of input polarity at the power terminal block

- ESD protection up to 15 kV for all ports
- Includes detachable wall mounting kit and DIN rail kit
- Compact industrial design with metal housing
- Weight: 285 g
- Colour: black
- Dimensions: L 13,9 x W 6,9 x H 2,5 cm
- Operating temperature: 0°C - 40°C (35°F to 100°F)

Attributes

- Number of ports: 4
- USB standard: USB 3.0 / 3.1
- USB-A (3.0) Connectors: 5



Package contents

- 1 x USB HUB
- 1 x cable USB A plug to USB B plug, length approx. 2 m
- 2 x wall mounting plates with screw package
- 1 x Top-hat rail mounting: 25 mm
- 1 x 3 pin terminal block
- Manual

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	20	11.72	28.50	42.00	40.00	47,880.00
Packaging Unit Inside	1	0.59	0.00	0.00	0.00	0.00
Packaging Unit Single	1	0.59	14.00	18.70	5.00	1,309.00
Net single without Packaging	1	0.29	6.90	13.90	2.50	0.00

More images:

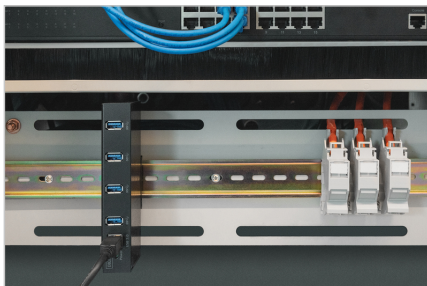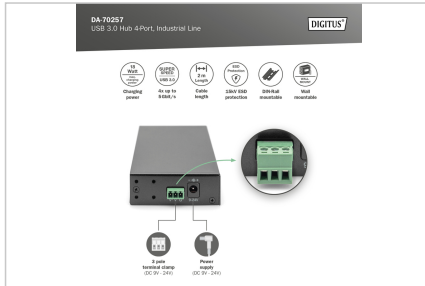

Safety notes

- A sobrecarga pode provocar sobreaquecimento e danos no aparelho ou nos periféricos ligados.
- Se for necessário, utilize uma fonte de alimentação externa para garantir um desempenho estável.
- Quando forem ligados dispositivos que exijam um elevado consumo de energia, como discos rígidos externos ou impressoras, o dispositivo deve ser utilizado com uma fonte de alimentação externa. Caso contrário,
- o dispositivo poderá ficar sobrecarregado ou poderão ocorrer problemas de funcionamento.
- Não exponha o aparelho à chuva, à humidade, a vapores ou a líquidos.
- Não introduza objetos no aparelho.
- Não tente reparar o aparelho por conta própria nem abrir a caixa. Corre o risco de sofrer um choque elétrico!
- Assegure uma ventilação adequada para evitar danos causados pelo sobreaquecimento.
- O pó, a humidade, os vapores, bem como produtos de limpeza ou solventes agressivos, podem causar danos no aparelho.
- Antes de limpar o aparelho, desligue-o da rede elétrica e dos aparelhos ligados ao mesmo.
- Limpe o aparelho com um pano sem pó.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany

<https://www.assmann.com>
info@assmann.com