

## DIGITUS® USB 2.0

AK-300200-018-S  
EAN 4016032283102



### USB extension cable, type A M/F, 1.8m, USB 2.0 suitable, black

Digitus® USB-Verlängerungskabel (USB-Verlängerungskabel A), Länge: 1,8 m, Datenrate bis zu 480 Mbit/s (High-Speed).  
Anschlussart: USB-A-Männchen / USB-A-Weibchen, USB-Verlängerungskabel, USB-Verlängerungskabel, USB-Verlängerungskabel, USB-Verlängerungskabel


#### Attributes


- Assortment: USB Cables
- Color cable: black

- Color connector: black
- Connector 1: USB A, plug
- Connector 2: USB A, jack
- Connector surface: nickel-plated
- Hoods: molded
- USB compliance: USB 2.0
- Length: 1.8 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	350	15.50	45.00	32.00	25.00	36,000.00
Packaging Unit Inside	10	0.44	35.00	20.00	3.00	2,100.00
Packaging Unit Single	1	0.04	0.70	11.50	21.00	169.05
Net single without Packaging	1	0.04	1.00	12.00	9.00	0.00

#### More images:

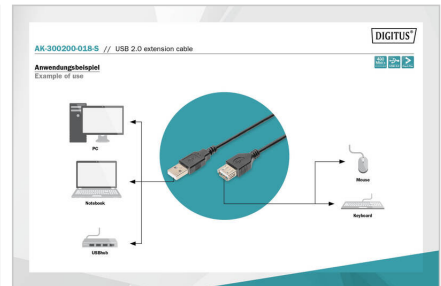

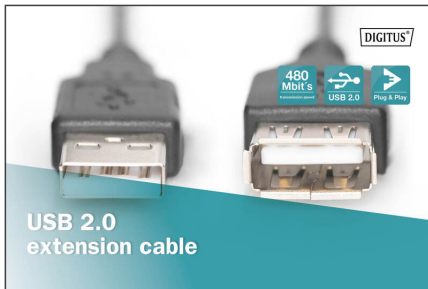

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)