


DIGITUS 2-Port Serial Interface Card, PCIe

DS-30000-1 EAN 4016032309390



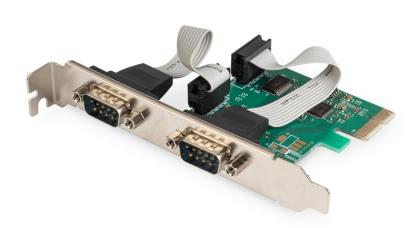

Serial I/O RS232 PClexpress Add-On card 2-port, incl. low profile, chipset:ASIX99100

This PCI Express based serial Add-On card allows you to turn a PCI Express slot into two RS232 (DB9) serial ports. Based on a native single chip design reduces the load applied to the CPU by as much as 48% over conventional serial cards.

Perfect for connecting serial modems, PDAs, digital cameras, printers, ISDN terminal adapters and many more

- 2 x DSUB 9, serial ports, male, UART 16C950
- · Chipset: AX99100
- Data transfer rate up to 1,5 Mbps

- Compliant with PCI Express base specification 2.0
- Compliant with PCI power management 1.2
- Operating temperature: 0 °C 70 °C
- Operating humidity: 0% 85% RH (non-condensing)
- Supports Windows 10, 8.1, 8, 7, Vista, XP, macOS X and Linux

Package contents

- 2-Port Serial Interface Card, PCle
- Low profile bracket
- Manual
- Driver CD

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	6.00	40.00	40.00	37.00	59.20
Packaging Unit Inside	1	0.15	6.00	18.00	18.00	1,944.00
Packaging Unit Single	1	0.15	6.00	18.00	18.00	1,944.00
Net single without Packaging	0	0.00	0.00	0.00	0.00	0.00

More images:







Safety notes

· Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.



- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstretching or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

EU responsible person

 ${\sf EU}$ based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH Auf dem Schüffel 3 Lüdenscheid, Germany https://www.assmann.com info@assmann.com