

# DIGITUS® Extensor DVI via CAT5 / CAT6

DS-54101

EAN 4016032285694



## Extensor de vídeo DVI via CAT5 até 70m (CAT5, UTP), resolução máxima 1920X1200@60Hz

O extensor DVI Cat.5 / Cat.6 aumenta a distância de transmissão da ligação DVI do seu PC para até 70 metros através de um simples cabo Cat5. A resolução possível depende da distância selecionada.

### Prolonga um sinal DVI até 70 metros

- Extensão DVI-D através de cabo Cat.5 / Cat.6
- Suporta uma resolução máxima de 1920x1200 pixéis a uma distância de 50 m
- Suporta uma extensão máxima de até 70 m com uma resolução de 800x600 pixéis

- Não é necessária uma fonte de alimentação externa
- Compressão: Sem compressão


### Attributes

- HDTV Standard: Full HD
- Resolution max.: 1920 x 1200 Pixel, 60Hz
- Category: CAT 5e
- Distance: 50 m
- KVM: no
- PoE (Power over Ethernet): no
- Transmission technology: CAT

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	10.58	33.50	37.00	27.50	34,086.20
Packaging Unit Inside	1	0.11	4.90	8.60	6.30	265.48
Packaging Unit Single	1	0.11	5.00	8.50	6.00	255.00
Net single without Packaging	1	0.06	5.60	4.00	2.30	187.50

**More images:**

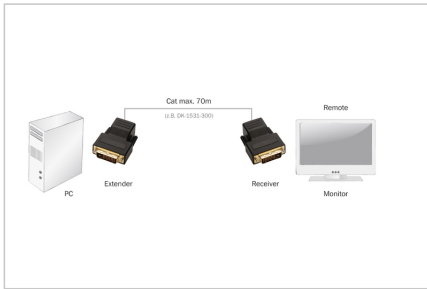

VIDEO VERLÄNGERUNGEN  
VIDEO EXTENSIONS

M = Meter / meters

Model	Resolution	Max. Cable Length (m)
<b>HDMI</b>		
OS-55800 1 in 1080p/60Hz	1080p	100 M
OS-55801	1080p	100 M
OS-55802	1080p	100 M
OS-55803 1 in 1080p/60Hz	1080p	100 M
OS-55804 1 in 1080p	1080p	100 M
OS-55805	1080p	100 M
<b>VGA</b>		
OS-52800 1	1080p	100 M
OS-52801 1 in 1080p	1080p	100 M
OS-52802	1080p	100 M
OS-52803 1 in 1080p	1080p	100 M
OS-52804 1 in 1080p	1080p	100 M
OS-52805 1 in 1080p	1080p	100 M
<b>DVI</b>		
OS-54801	1080p	100 M
OS-54802	1080p	100 M

**Safety notes**

- If the device is powered by a plug-in power supply, ensure that the power adapter is connected correctly and meets the specified requirements (e.g. voltage and current).
- Only use certified CAT5e or CAT6 cables to ensure stable signal transmission.
- For particularly long cable runs or in environments prone to interference, it is recommended to use shielded network cables.
- Make sure that all connections are tight and secure to avoid loose contacts that could affect the signal quality. Make sure that the HDMI and Ethernet connections are connected correctly.
- Make sure that the CAT cable is not laid near high-voltage power lines or other strong sources of electromagnetic interference to avoid signal interference.
- Only operate the device within the specified temperature range.
- Do not use the device outdoors or in damp or wet environments
- Check all connections and cables regularly for wear or damage. Cables and connections can wear out, especially with frequent use or long installations, which can lead to poor signal quality or system failure.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)