


# Digitus® USB 2.0 connection cable

AK-300110-010-S

EAN 4016032285793

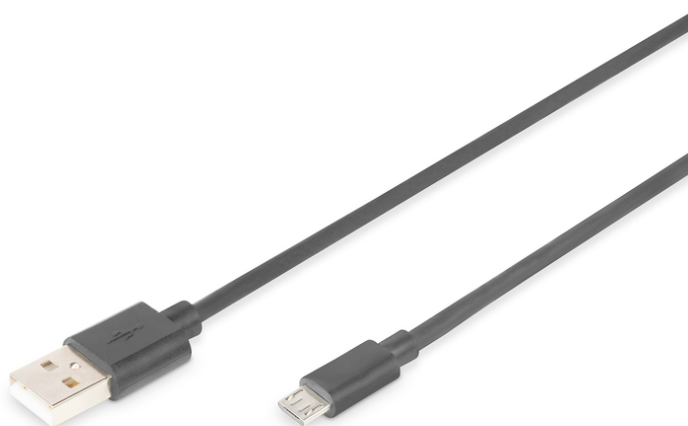

## USB 2.0 connection cable, type A - micro B M/M, 1.0m, USB 2.0 conform, bl

For connection of external USB devices (with USB micro B socket, e.g. MP3-player, smart phone or external HDD enclosure) to the USB host (e. g. PC, notebook or USB hub). Data transfer rate up to 480 Mbps (High-Speed).

**Allows a reliable and fast connection of external USB devices with the PC.**



- Data transfer rate up to 480MB/s
- Power supply up to 5V/0,5A and 2.5W
- Copper wire, foil and braid shielding for robustness and reliable connection

### Attributes

- Assortment: USB Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: USB A, plug
- Connector 2: Micro USB B, plug
- Connector surface: nickel-plated
- Ferrite filter: none
- Hoods: molded
- Packaging: Polybag
- USB compliance: USB 2.0
- Wire material: CU
- Length: 1 m
- Shielding: Double shielding

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 500          | 13.58       | 32.00      | 45.00      | 25.00       | 36,000.00 |
| Packaging Unit Inside        | 10           | 0.27        | 24.00      | 21.00      | 3.00        | 1,512.00  |
| Packaging Unit Single        | 1            | 0.03        | 0.80       | 9.20       | 19.60       | 144.26    |
| Net single without Packaging | 1            | 0.03        | 0.50       | 10.50      | 8.50        | 0.00      |

## More images:

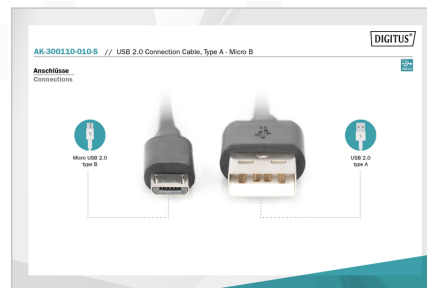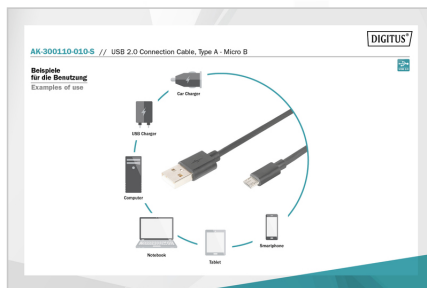

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schöffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)