

DIGITUS® Cabo adaptador DisplayPort

AK-340301-030-S

EAN 4016032289128



Cabo adaptador DisplayPort, tipo DP - DVI (24+1) P/E, 3.0m, c/ bloqueio DP 1.1a, bw

Este cabo digital HD converte sinais DisplayPort em sinais DVI e é ideal para ligar dispositivos com uma interface DisplayPort a um televisor, projetor ou monitor compatível com HD com uma interface DVI.

Resolução Full HD até 1080p


- Suporta até 1080p com 60 Hz
- Núcleos de cobre, folha e trança blindados para robustez e uma ligação fiável
- Plug and play, sem necessidade de driver adicional
- Modos de transmissão suportados: RBR, HBR, HBR2
- Largura de banda máxima: 10,8 Gbps
- Versão HBR/modo de transferência: HBR1 (2,70 Gbit/s por via)
- Versão HDCP: HDCP 1.3

Attributes

- Assortment: DisplayPort Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DVI-D, (24+1), plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Packaging: Polybag
- Wire material: CU
- Length: 3 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	60	10.00	50.00	32.00	22.00	35,200.00
Packaging Unit Inside	10	1.67	22.00	15.00	3.50	1,155.00
Packaging Unit Single	1	0.17	2.80	17.00	24.50	1,166.20
Net single without Packaging	1	0.16	15.00	15.00	2.50	0.00

More images:

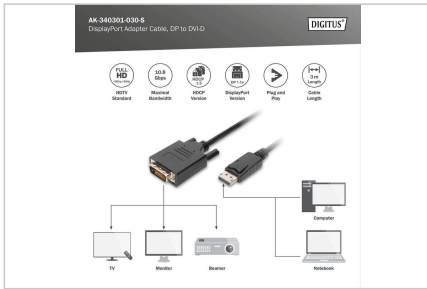

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com