

# DIGITUS® Adaptador / conversor DisplayPort

AK-340403-001-S

EAN 4016032289289



**Cabo adaptador DisplayPort, tipo DP – HD15 St/Bu, 0,15m,c/interlock, compatível com DP 1.2, preto**

Este adaptador/conversor é ideal para ligar um computador portátil ou computador com uma interface DP a um monitor VGA, projetor, monitor LCD/TFT através de um cabo de monitor VGA, por exemplo.

**Utilize uma fonte de vídeo DisplayPort com o seu projetor ou ecrã VGA sem qualquer perda de qualidade**

- Suporta resoluções HDTV até 1080p a 60 Hz
- Suporta resoluções de monitor até 1920 x 1200p
- Modos de transmissão suportados: RBR, HBR, HBR2
- Largura de banda máxima: 21,6 Gbps
- Versão HBR/modo de transferência: HBR2 (5,40 Gbit/s por via)
- Versão HDCP: HDCP 1.3


**Attributes**

- Assortment: DisplayPort Cables

- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: HD15, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: Snap fastener
- Packaging: Polybag
- Wire material: CU
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	200	8.00	38.10	30.20	31.10	35,784.30
Packaging Unit Inside	10	0.40	40.60	40.60	8.10	13,351.70
Packaging Unit Single	1	0.04	20.00	15.00	1.62	486.00
Net single without Packaging	1	0.03	24.50	4.50	1.50	0.00

**More images:**

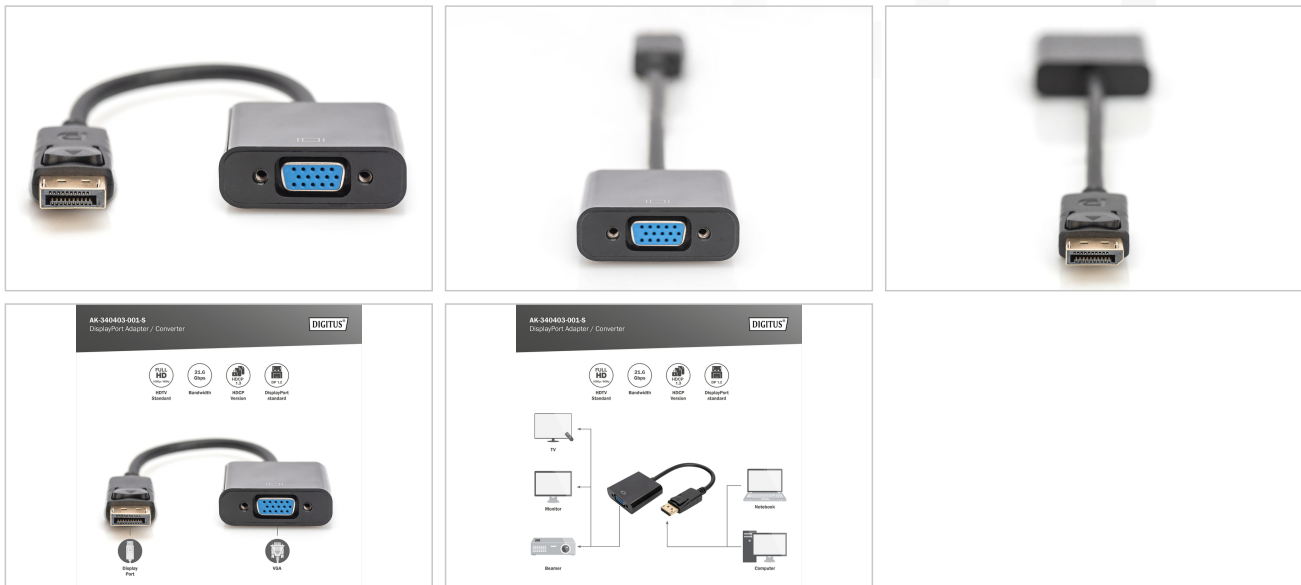

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)