


# DIGITUS® HDMI High Speed with Ethernet connection cable

AK-330107-020-S  
EAN 4016032290957

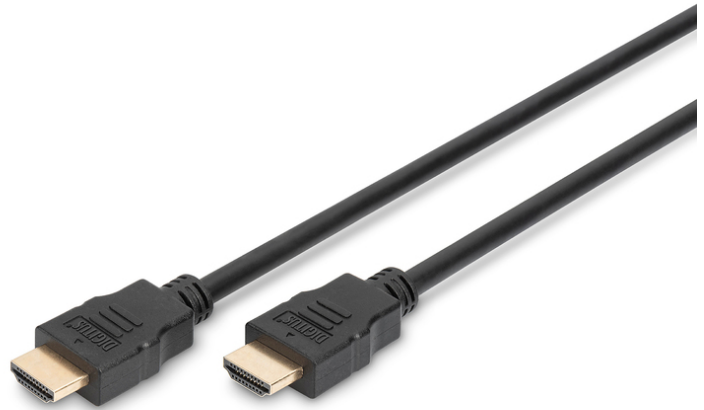

## HDMI Premium High Speed Connection Cable, Type A M/M, 2.0m, Ultra HD, 4K@60Hz, gold, bl

With this cable standard, this high-speed HDMI cable supports all of today's requirements - from the playback of high-resolution UHD 4K content, including in 3D, to two-way audio transmission (ARC) and the control of HDMI devices via CEC. You can also use internet applications via the HDMI cable without having to connect an additional Ethernet cable. With Lip-Sync, time-shifted lip movements are a thing of the past. You can also use this cable to transmit up to 32 audio channels and enjoy picture output in 21:9 Cinemascope format. Get more out of your Blu-Ray player, games console or HD streaming portal. Gold-plated contacts and the triple shielding of the cable ensure maximum conductivity and interference-free transmission.

### 4K Ultra HD and 3D compatible + Ethernet over HDMI

- Supports up to 4K Ultra HD/ 60Hz
- 3D support
- Supports Audio Return Channel (ARC)
- Supports Consumer Electronic Control (CEC)
- Supports lip-sync (audio/video synchronization)
- Dolby TrueHD capable
- Multi stream audio/video support
- 21:9 Cinemascope support


- 32 channel audio support
- With Ethernet channel (HEC)
- HDMI 2.0

### Attributes

- Ambalaža: Polybag
- Asortiman: HDMI kabele
- AWG: 30
- Feritni filter: nema
- HDMI-norma: Premium HDMI velike brzine s Ethernetom
- HDTV-norma: Ultra HD 4K
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: HDMI tip A, utikač
- Konektor 2: HDMI tip A, utikač
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: pozlaćeno
- rezolucija maks.: 3840 x 2160 piksela, 60 Hz
- Duljina: 2 m
- AOC - aktivni optički kabel: Ne
- oklop: trostruki oklop

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	120	12.80	45.00	32.00	25.00	36,000.00
Packaging Unit Inside	5	0.53	5.00	44.00	44.00	9,680.00
Packaging Unit Single	1	0.11	25.00	17.00	2.00	850.00
Net single without Packaging	1	0.09	17.00	13.00	3.00	0.00

**More images:**

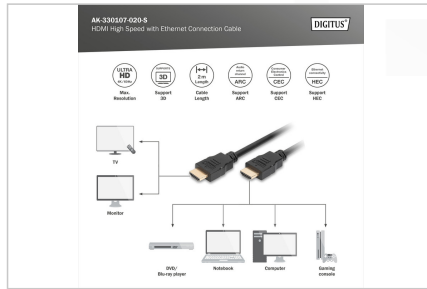

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)