


Digitus® HDMI High Speed with Ethernet connection cable

AK-330107-050-S

EAN 4016032290971

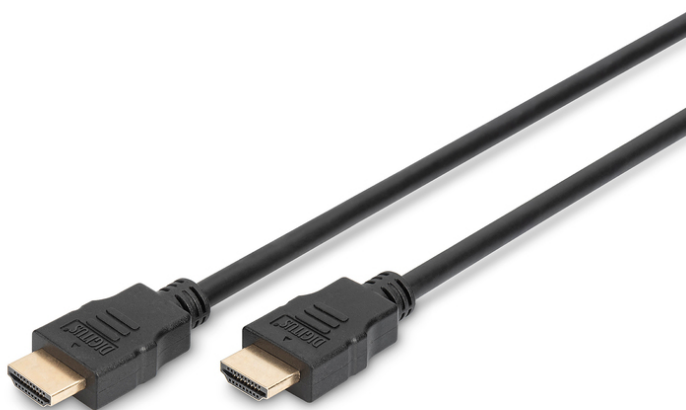

HDMI High Speed Connection Cable, Type A, w/Ethern M/M, 5.0m, Ultra HD, 4K@30Hz, gold, bl

This 4K and 3D-compatible cable is used to connect audio/video devices, such as Blu-ray players, games consoles, etc., to a TV, monitor or PC. Also suitable for use with any IP-based application.

4K audio / video transmission (3840x2160) + Ethernet over HDMI

- Supports up to 4K Ultra HD with 30 Hz
- 3D support
- Supports Audio Return Channel (ARC)
- Supports Consumer Electronic Control (CEC)
- Supports lip-sync (audio/video synchronization)
- Dolby TrueHD capable
- With Ethernet channel (HEC)

Attributes

- Assortment: HDMI Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Resolution max.: 3840 x 2160 Pixel, 30Hz
- Wire material: CU
- Length: 5 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	60	13.85	25.00	32.00	45.00	36,000.00
Packaging Unit Inside	5	1.15	43.00	45.00	4.00	7,740.00
Packaging Unit Single	1	0.23	27.00	19.00	2.00	1,026.00
Net single without Packaging	1	0.18	16.00	13.50	4.00	0.00

The diagram illustrates the DVI-D to HDMI adapter cable's versatility. It shows a central cable with a DVI-D connector on one end and an HDMI connector on the other. On the DVI-D side, two lines branch out to a 'TV' and a 'Monitor'. On the HDMI side, four lines branch out to a 'DVI-D to VGA adapter', a 'Laptop', a 'Computer' (tower unit), and a 'Tablet'.



- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com