

# DIGITUS® HDMI High Speed

AK-330107-050-S  
EAN 4016032290971



### HDMI High Speed connection cable, type A M/M, 5.0m, Full HD 60p, gold, bl

Digitus HDMI High Speed connection cable, type A M/M, 5.0m, Full HD 60p, gold, bl. Supports 4K Ultra HD, 3D, Ethernet over HDMI, ARC, CEC, Lip-Sync, Dolby TrueHD, Ethernet (HEC). Color connector: black. Connector 1: HDMI type A, plug. Connector 2: HDMI type A, plug. Connector surface: gold-plated. HDMI Standard: High Speed HDMI with Ethernet. HDTV Standard: Ultra HD 4K. Heads: molded. Packaging: Polybag. Resolution max.: 3840 x 2160 Pixel, 30Hz. Wire material: CU. Length: 5 m. AOC - Active Optical Cable: no. Shielding: triple shielding.

### 4K audio / video transmission (3840x2160) + Ethernet over HDMI

- Supports 4K Ultra HD @ 30 FPS
- Supports 3D
- Supports Ethernet over HDMI (ARC)
- Supports CEC (Consumer Electronics Control)
- Supports Lip-Sync (Lip-Sync)
- Supports Dolby TrueHD
- Supports Ethernet (HEC)


- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Heads: molded
- Packaging: Polybag
- Resolution max.: 3840 x 2160 Pixel, 30Hz
- Wire material: CU
- Length: 5 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

### Attributes

- Assortment: HDMI Cables

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	60	13.85	25.00	32.00	45.00	36,000.00
Packaging Unit Inside	5	1.15	43.00	45.00	4.00	7,740.00
Packaging Unit Single	1	0.23	27.00	19.00	2.00	1,026.00
Net single without Packaging	1	0.18	16.00	13.50	4.00	0.00

**More images:**

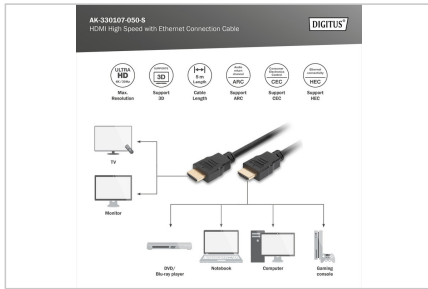

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)