

# DIGITUS® HDMI High Speed with Ethernet Extension Cable

AK-330201-030-S  
EAN 4016032291145



**HDMI High Speed Extension Cable, Type A M/F, 3.0m, w/Ethernet, 4K 60 Hz, HDMI 2.0, gold, bl**

This Full HD (1080p) and 3D suitable cable used for extension of existing audio/video connections between Blu-ray player, game pads or consoles, etc., for example, and TV, monitor or computer. Capable for use of any IP-based application.

**4K/Ultra HD and 3D capable + Ethernet connectivity**

- Support up to 4K with 60Hz
- HDMI-Standard: 2.0



**Attributes**

- Assortment: HDMI Cables
- AWG: 30
- Color cable: black

- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, jack
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Wire material: CU
- Length: 3 m
- AOC - Active Optical Cable: no
- Shielding: triple shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 30           | 10.80       | 35.00      | 26.00      | 24.00       | 21,840.00       |
| Packaging Unit Inside        | 10           | 3.60        | 6.00       | 42.00      | 41.00       | 10,332.00       |
| Packaging Unit Single        | 1            | 0.36        | 2.50       | 14.00      | 24.00       | 840.00          |
| Net single without Packaging | 1            | 0.36        | 0.00       | 0.00       | 0.00        | 0.00            |

**More images:**

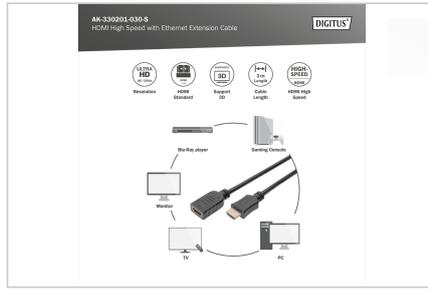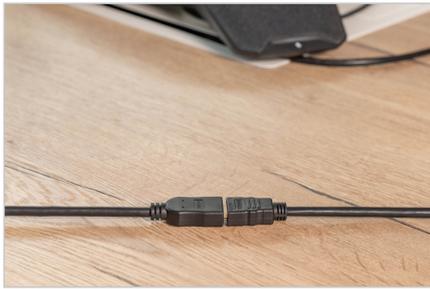

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)