DIGITUS® DisplayPort adapter cable, DP to DVI-D

DB-340301-020-S

EAN 4016032292234



DisplayPort Adapter Cable, Type DP-DVI (24+1) M/M, 2.0m, w/interlock, Full HD, DP 1.1a, bl

This HD cable converts digital DisplayPort signals into DVI signals. It is ideal for connecting devices with a DisplayPort interface to an HD-capable TV, projector or monitor with a DVI interface. The gold-plated contact surfaces and double shielding ensure loss-free data transmission.

Full HD resolution of up to 1080p

- Digital Full HD, Dual Link
- Max. supported Video Resolution: 1920 x 1080 p with 60 Hz
- Supported transmission modes: RBR, HBR, HBR2
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

Attributes


- Assortment: DisplayPort Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DVI-D, (24+1), plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Wire material: CU
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	50	12.50	33.50	29.50	27.00	26,682.80
Packaging Unit Inside	10	2.50	33.50	29.50	27.00	26,682.80
Packaging Unit Single	1	0.25	6.00	16.00	25.50	2,448.00
Net single without Packaging	1	0.12	2.00	6.00	20.00	0.00

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:

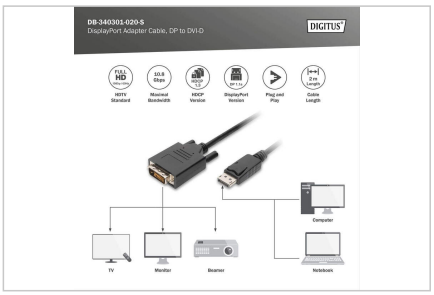





Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com