

# DIGITUS® Cabo adaptador DisplayPort, DP para DVI-D

DB-340301-020-S

EAN 4016032292234



## Cabo adaptador DisplayPort, tipo DP – DVI (24+1) St/St, 2.0m, c/ bloqueio, Full HD, DP 1.1a, pb

Este cabo HD converte sinais digitais DisplayPort em sinais DVI. É ideal para ligar dispositivos com uma interface DisplayPort a um televisor, projetor ou monitor compatível com HD com uma interface DVI. As superfícies de contacto banhadas a ouro e a blindagem dupla garantem uma transmissão de dados sem perdas.

### Resolução Full HD até 1080p


- Digital Full HD, ligação dupla
- Resolução máxima de vídeo suportada: 1920 x 1080 p com 60 Hz
- Modos de transmissão suportados: RBR, HBR, HBR2
- Largura de banda máxima: 10,8 Gbps
- Versão HBR/modo de transferência: HBR1 (2,70 Gbit/s por via)
- Versão HDCP: HDCP 1.3

### Attributes

- Assortment: DisplayPort Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: DP, plug
- Connector 2: DVI-D, (24+1), plug
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.1a
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Wire material: CU
- Length: 2 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

| Logistics                    |              |             |            |            |             |                 |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm <sup>3</sup> |
| Packaging Unit Carton        | 50           | 12.50       | 33.50      | 29.50      | 27.00       | 26,682.80       |
| Packaging Unit Inside        | 10           | 2.50        | 33.50      | 29.50      | 27.00       | 26,682.80       |
| Packaging Unit Single        | 1            | 0.25        | 6.00       | 16.00      | 25.50       | 2,448.00        |
| Net single without Packaging | 1            | 0.12        | 2.00       | 6.00       | 20.00       | 0.00            |

**More images:**

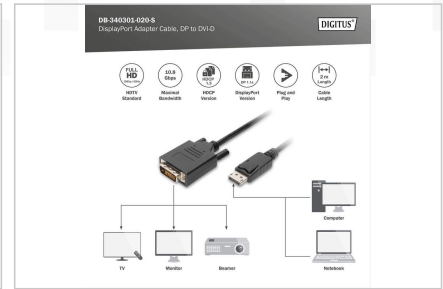

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)