

# DIGITUS® Cabo adaptador DisplayPort, DP para DVI-D

DB-340301-030-S

EAN 4016032292241



## Cabo adaptador DisplayPort, tipo DP – DVI (24+1) St/St, 3.0m, com bloqueio. Full HD, DP 1.1a, p/b

Este cabo HD converte sinais digitais DisplayPort em sinais DVI. É ideal para ligar dispositivos com uma interface DisplayPort a um televisor, projetor ou monitor compatível com HD com uma interface DVI. As superfícies de contacto banhadas a ouro e a blindagem dupla garantem uma transmissão de dados sem perdas.

### Resolução Full HD até 1080p

- Digital Full HD, ligação dupla
- Resolução máxima de vídeo suportada: 1920 x 1080 p com 60 Hz
- Modos de transmissão suportados: RBR, HBR, HBR2
- Largura de banda máxima: 10,8 Gbps
- Versão HBR/modo de transferência: HBR1 (2,70 Gbit/s por via)
- Versão HDCP: HDCP 1.3

### Attributes


- AWG: 30
- Color cable: black
- Connector 1: DP, plug
- Connector 2: DVI-D, (24+1), plug
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.1a
- Ferrite filter: none
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: Snap fastener
- Length: 3 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

### Package contents

- 1 x cabo adaptador DisplayPort, DP para DVI-D

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	50	10.50	44.00	26.00	44.00	50,336.00
Packaging Unit Inside	25	5.25	21.00	24.00	42.00	21,168.00
Packaging Unit Single	1	0.21	4.00	8.00	23.00	736.00
Net single without Packaging	1	0.25	5.00	6.00	20.00	0.00

**More images:**

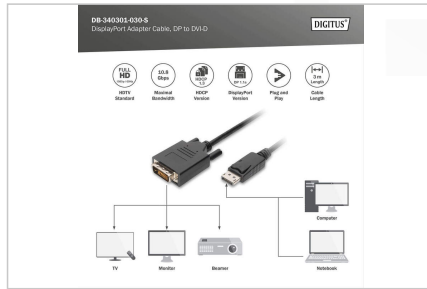

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)