

DIGITUS® DisplayPort Adapter Cable - Mini DP to HDMI Type A

DB-340404-001-W
EAN 4016032292425



DisplayPort Adapter Cable, Type mini DP-HDMI A M/F, 0.15m, Full HD, DP 1.1a, wh

This digital HD video/audio adapter/converter is ideally suited for connecting a Mini DisplayPort device to an HDMI monitor, projector, LCD/TFT monitor or LED-TV via an HDMI cable. The adapter cable supports resolutions of up to 1080p with 60 Hz. The gold-plated contact surfaces and double shielding ensure loss-free data transfer.

Connect Mini DisplayPort devices with HDMI displays of all kinds

- Supports up to 1080p with 60 Hz
- Supports DP++ Dual Mode
- Maximal bandwidth: 10,8 Gbps
- HBR-Version/transfer mode: HBR1 (2,70 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

Attributes

- Assortment: DisplayPort Cables


- AWG: 32
- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.1a
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: none
- Wire material: CU
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Package contents

- 1 x DisplayPort Adapter Cable - Mini DP to HDMI Type A

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	400	1.08	26.00	44.00	34.00	38,896.00
Packaging Unit Inside	50	0.14	24.00	42.00	16.00	16,128.00
Packaging Unit Single	1	0.00	5.50	23.00	2.00	253.00
Net single without Packaging	1	0.02	6.00	20.00	3.00	0.00

More images:

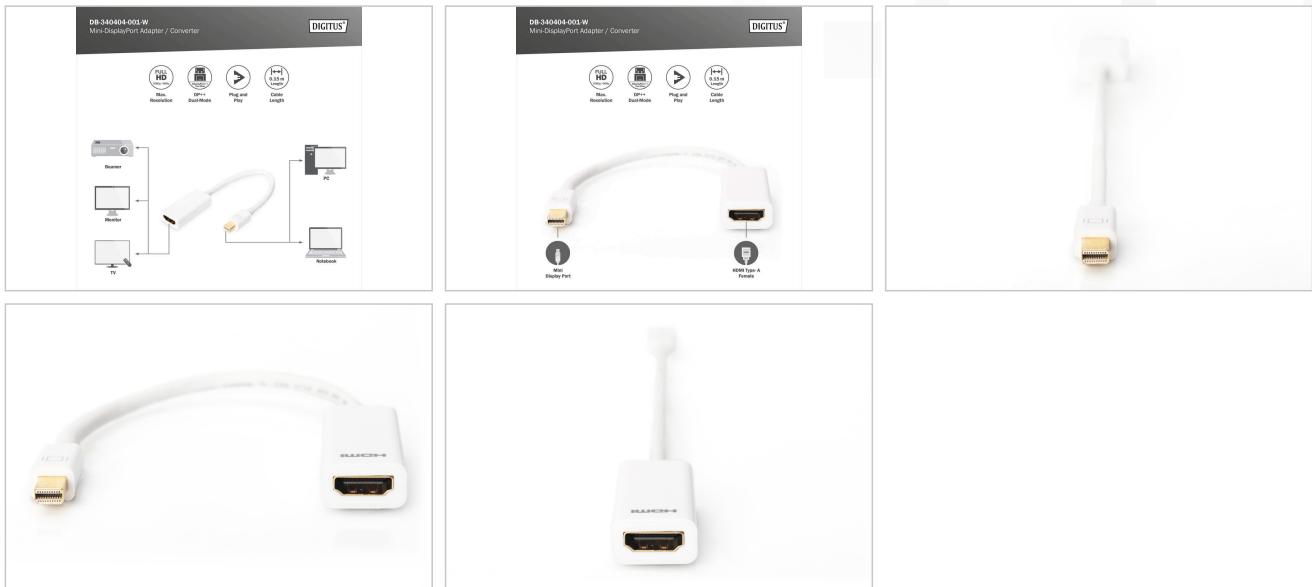

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com