

# DIGITUS® Cabo adaptador DisplayPort - Mini DP para HDMI tipo A

DB-340404-001-W

EAN 4016032292425



## Cabo adaptador DisplayPort, tipo mini DP - HDMI A St/Bu, 0,15 m, Full HD, DP 1.1a, branco

Este adaptador/conversor de vídeo/áudio HD digital é ideal para ligar um dispositivo Mini DisplayPort a um monitor HDMI, projetor, monitor LCD/TFT ou televisor LED através de um cabo HDMI. O cabo adaptador suporta resoluções até 1080p a 60 Hz. As superfícies de contacto banhadas a ouro e a blindagem dupla garantem uma transmissão de dados sem perdas.

### Ligar dispositivos mini DisplayPort a todos os tipos de ecrãs HDMI

- Suporta até 1080p com 60 Hz
- Suporta o modo duplo DP++
- Largura de banda máxima: 10,8 Gbps
- Versão HBR/modo de transferência: HBR1 (2,70 Gbit/s por via)
- Versão HDCP: HDCP 1.3

### Attributes

- Assortment: DisplayPort Cables

- AWG: 32
- Color cable: white
- Color connector: white
- Connector 1: Mini DP, plug
- Connector 2: HDMI type A, jack
- Connector surface: gold-plated
- DisplayPort standard: DisplayPort 1.1a
- HDTV Standard: Full HD
- Hoods: molded
- Interlock: none
- Wire material: CU
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding


### Package contents

- 1 x cabo adaptador DisplayPort - Mini DP para HDMI tipo A

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	400	1.08	26.00	44.00	34.00	38,896.00
Packaging Unit Inside	50	0.14	24.00	42.00	16.00	16,128.00
Packaging Unit Single	1	0.00	5.50	23.00	2.00	253.00
Net single without Packaging	1	0.02	6.00	20.00	3.00	0.00

**More images:**

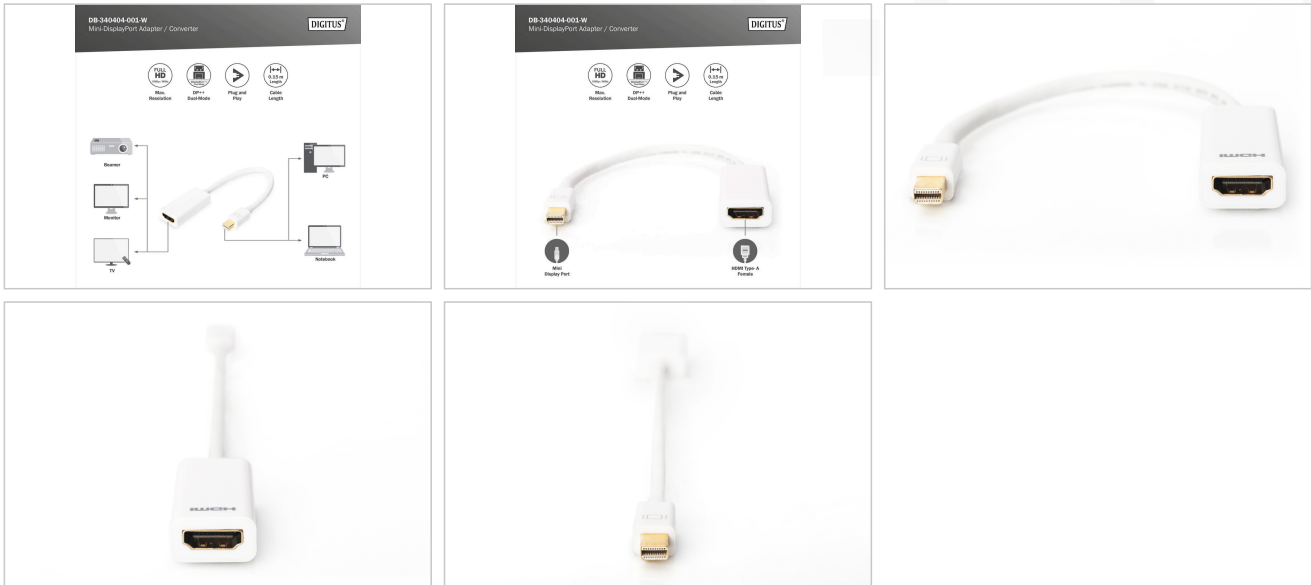

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)