

DIGITUS® DisplayPort adapter cable, mini DP - DP

DB-340405-001-W
EAN 4016032292432



DisplayPort Adapter Cable, Type mini DP-DP St/Bu, 0.15m, UHD 4K, DP 1.2 konform, we

This digital HD video and audio cable is ideally suited for connecting a MacBook®, MacBook Air®, MacBook Pro®, iMac®, Mac mini® and Mac Pro® to a DP monitor or projector, LCD-TFT monitor using a DisplayPort cable. The DIGITUS® cable is compatible with DisplayPort version 1.2 and supports resolutions of up to UHD 4 K/60 Hz.

Use mini DisplayPort devices on standard DisplayPort connections


- Supports resolutions up to UHD 4K/60Hz
- Maximal bandwidth: 21,6 Gbps
- HBR-Version/transfer mode: HBR2 (5,40 Gbit/s per lane)
- HDCP-Version: HDCP 1.3

Attributes

- AWG: 32
- Color cable: white
- Connector 1: Mini DP, plug
- Connector 2: DP, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: none
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	6.10	20.00	30.00	40.00	24,000.00
Packaging Unit Inside	20	1.53	24.00	17.00	28.00	11,424.00
Packaging Unit Single	1	0.08	26.00	7.50	2.50	487.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

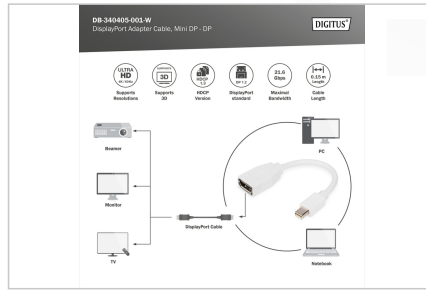

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com