

DIGITUS® Cabo adaptador DisplayPort, mini DP - DP

DB-340405-001-W
EAN 4016032292432



Cabo adaptador DisplayPort, tipo mini DP - DP St/Bu, 0,15 m, compatível com UHD 4K, DP 1.2, branco

Este cabo de vídeo e áudio digital HD é ideal para ligar um MacBook®, MacBook Air®, MacBook Pro®, iMac®, Mac mini® e Mac Pro® a um monitor DP ou projetor, monitor LCD/TFT através de um cabo DisplayPort. O cabo DIGITUS® é compatível com a versão 1.2 do DisplayPort e suporta resoluções até UHD 4K/60Hz.

Utilizar dispositivos Mini DisplayPort em ligações DisplayPort convencionais

- Suporta resoluções até UHD 4K/60Hz
- Largura de banda máxima: 21,6 Gbps
- Versão HBR/modo de transferência: HBR2 (5,40 Gbit/s por via)
- Versão HDCP: HDCP 1.3


Attributes

- AWG: 32
- Color cable: white
- Connector 1: Mini DP, plug
- Connector 2: DP, jack
- Connector surface: nickel-plated
- DisplayPort standard: DisplayPort 1.2
- Ferrite filter: none
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Interlock: none
- Length: 0.15 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	80	6.10	20.00	30.00	40.00	24,000.00
Packaging Unit Inside	20	1.53	24.00	17.00	28.00	11,424.00
Packaging Unit Single	1	0.08	26.00	7.50	2.50	487.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

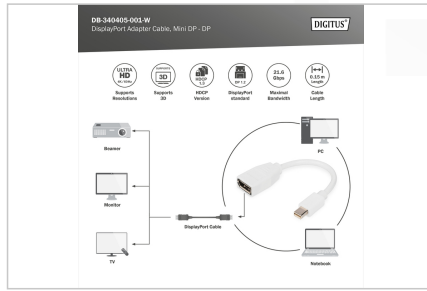

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com