

Digitus® Modularni patch panel, 24 priključka, stepenasti

DN-91412

EAN 4016032295105



PANEL KEYSTONE 24-PORTNI 1U 19" DN-91412 Ral:7035- blank, 1U, rack mount, staggered, bl RAL 9005

Stepenasti modularni patch paneli s 24 porta tvrtke DIGITUS® idealni su za montažu u ormare 483 mm (19") zahvaljujući čeliku od ugljika hladno valjanom debljine 1,5 mm. Pomaknuti raspored keystone modula poboljšava prigušenje između susjednih kanala prijenosa. Dostupni su u sivoj (RAL 7035) i crnoj (RAL 9005) boji.

- Dizajn Keystone nosača: Stepenasti
- Područja primjene: razvodna ormarica 483 mm (19")
- Standardi: ISO/IEC 11801 3. izd., EN 50173-1, EIA/TIA 568-C
- Opće karakteristike:
- Pogodno za montažu u ormar 483 mm (19")
- Pogodno za oklopljene Digitus® Keystone module i spojnice
- Središnja uzemljivačka veza

- Tehničke karakteristike:
- Materijal kućišta: 1,5 mm SPCC hladno valjani čelični lim, praškovano
- Materijalni standard: EN 10 130(1991), BS 1449, NFA 36/401, DIN 1623, UNI 5866, UNE 36-086, SIS, JIS G 3141, ASTM, SAE, NFA 36/401
- Materijal uzemljivača: pocinčani čelik
- Fizička svojstva:
- Radna temperatura: -20 °C do +70 °C (ISO/IEC 11801, EN 50173-1, ANSI/TIA/EIA 568 C)
- Boja: Crna RAL9005


Attributes

- Boja: crna, RAL 9005
- Jedinice: 1
- Priključci: 24

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	15	13.19	56.00	40.00	30.00	67,200.00
Packaging Unit Inside	1	0.88	5.00	54.00	15.00	4,050.00
Packaging Unit Single	1	0.88	5.00	54.00	15.00	4,050.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

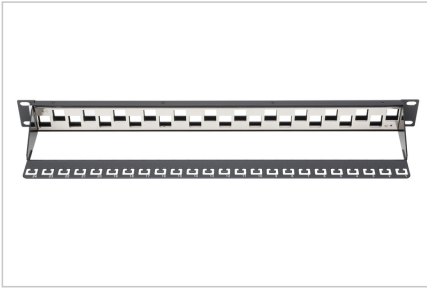

Safety notes

- Protect product from moisture

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schöffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com