

# DIGITUS® Cabo de ligação HDMI de alta velocidade, com amplificador

AK-330105-200-S

EAN 4016032295822



## Cabo de ligação HDMI de alta velocidade, tipo A, c/amp. St/St, 20,0 m, Full HD, dourado, preto

Este cabo compatível com Full HD (1080p) e 3D com amplificador ativo é utilizado para ligar dispositivos áudio/vídeo, como leitores Blu-ray, consolas de jogos, etc., a um televisor, monitor ou PC.

### Compatível com Full HD e 3D

- Suporte de funcionalidades HDMI 1.3
- Suporta até 1080p com 60 Hz
- Formatos de vídeo suportados: 1080p @24 Hz, 1080p @30 ou 60@Hz; 3D
- Formatos de áudio suportados: DVD-Audio, SACD, Dolby Digital Plus, TrueHD e dts-HD
- Suporte 3D
- Importante: Este cabo HDMI ativo é direcional. Uma direção de ligação incorrecta resultará na ausência de sinal.


### Attributes

- Assortment: HDMI Cables
- AWG: 28
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, plug
- Connector surface: gold-plated
- HDMI Standard: High Speed HDMI
- HDTV Standard: Full HD
- Hoods: molded
- Resolution max.: 1920 x 1080 Pixel, 60Hz
- Wire material: CU
- Length: 20 m
- AOC - Active Optical Cable: no
- Shielding: Double shielding

### Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	10	14.13	50.50	32.50	21.50	35,286.90
Packaging Unit Inside	1	1.41	19.00	19.00	8.00	2,888.00
Packaging Unit Single	1	1.41	19.00	19.00	8.00	2,888.00
Net single without Packaging	1	1.20	17.50	17.00	7.50	0.00

**More images:**

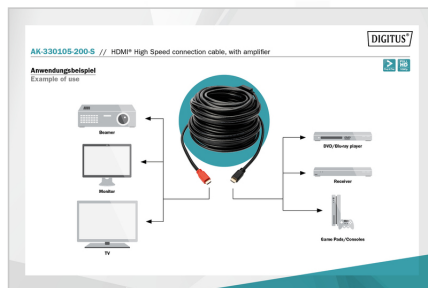

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)