# DIGITUS® HDMI Y-Splitter Cable

**AK-330400-002-S**

**EAN 4016032296119**

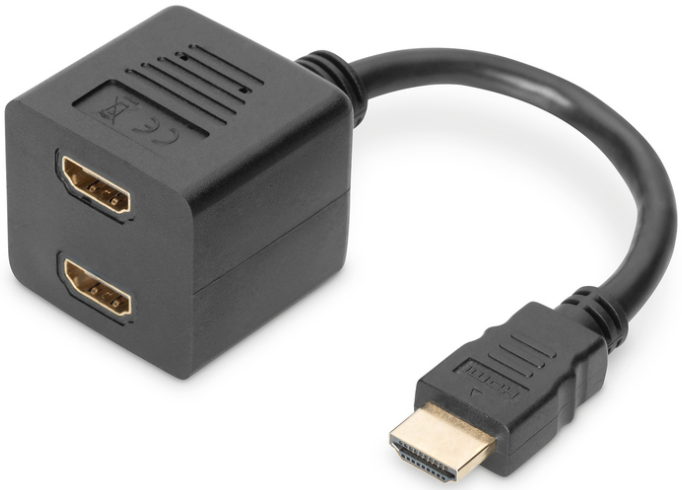

**HDMI Y-Splitter Cable, Type A -2x Type A M/F, 0.2m, passiv, Full HD, gold, bl**

This passive Full HD (1080p) and 3D suitable cable is usefull to connect 2 TV's or monitors with the interface of a PC or notebook, for example. Simultaneous use of both devices is not possible.

**Full HD, Dual-Link**

- Support 1080p with 24Hz
- HDMI type A plug <=> 2x HDMI type A jack
- Molded housing
- shielded
- AWG30
- UL20276
- Gold plated
- Color: Black

**Attributes**

- Assortment: HDMI Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: 2x HDMI type A/F
- Connector surface: gold-plated
- Ferrite filter: none
- HDMI Standard: High Speed HDMI
- HDTV Standard: Full HD
- Hoods: molded
- Packaging: Polybag
- Resolution max.: 1920 x 1200 Pixel, 60Hz
- Wire material: CU
- Length: 0.2 m
- AOC - Active Optical Cable: no
- Shielding: single shielding

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 70 | 8.70 | 35.00 | 26.00 | 24.00 | 21,840.00 |
| **Packaging Unit Inside** | 10 | 1.24 | 40.00 | 33.00 | 5.00 | 6,600.00 |
| **Packaging Unit Single** | 1 | 0.12 | 25.00 | 14.00 | 4.00 | 1,400.00 |
| **Net single without Packaging** | 1 | 0.11 | 22.00 | 4.00 | 3.60 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**






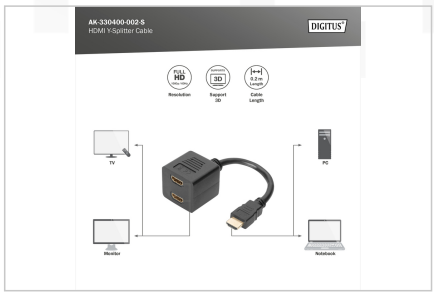


**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com