

DIGITUS® HDMI

AK-330500-000-S
EAN 4016032296140



HDMI adapter, type A F/F, Ultra HD 60p, bi

Digitus AK-330500-000-S is a black HDMI adapter that converts an HDMI type A jack to an HDMI type F female connector. It supports Ultra HD 60p resolution and is compatible with 3D content. The adapter is made of molded plastic and is packaged in a polybag. It is an active optical cable (AOC) with single shielding. The connector surface is nickel-plated. The adapter is compatible with the HDMI Standard: Premium High Speed HDMI with Ethernet. The HDTV Standard is Ultra HD 4K. The resolution is up to 3840 x 2160 pixels at 60Hz. The length is 0.03 meters. The AOC is not active. The shielding is single shielding.

Supports 4K/Ultra HD 3D + Ethernet

- Supports 4K/2K @ 60 Hz


Attributes

- Assortment: HDMI Cables
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, jack

- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Length: 0.03 m
- AOC - Active Optical Cable: no
- Shielding: single shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	350	5.60	32.00	30.00	22.00	21,120.00
Packaging Unit Inside	50	0.80	24.50	20.00	4.50	2,205.00
Packaging Unit Single	1	0.02	19.00	9.00	2.00	342.00
Net single without Packaging	1	0.01	1.00	2.00	3.00	0.00

More images:

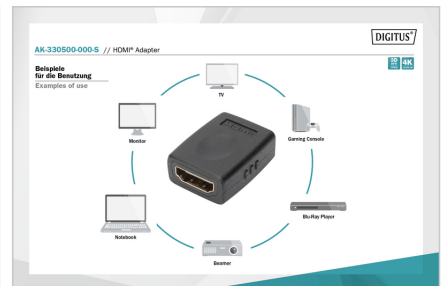



Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com