# DIGITUS® HDMI adapter, 90° angled

**AK-330502-000-S**

**EAN 4016032296164**



**HHDMI Adapter, Type A, 90ø angled M/F, UHD 4K@60Hz, gold, bl**

This 4K 60Hz and 3D suitable adapter is used to ensure a better connection of normal HDMI cables with straight connectors in case of lack space. To avoid to bend the cable more than necessarry, for example .

**4K/Ultra HD and 3D capable + Ethernet connectivity**

- Support up to 4K/2K with 60Hz
- Manufacturer's notice: Please check whether the adapter enables the desired angle direction for your application. Please note the plug-in direction on your device.

**Attributes**

- Assortment: HDMI Cables

- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Length: 0.02 m
- AOC - Active Optical Cable: no
- Shielding: single shielding

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 250 | 4.50 | 32.00 | 30.00 | 22.00 | 21,120.00 |
| **Packaging Unit Inside** | 50 | 0.90 | 4.00 | 18.00 | 25.00 | 1,800.00 |
| **Packaging Unit Single** | 1 | 0.02 | 1.50 | 7.00 | 7.50 | 78.75 |
| **Net single without Packaging** | 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

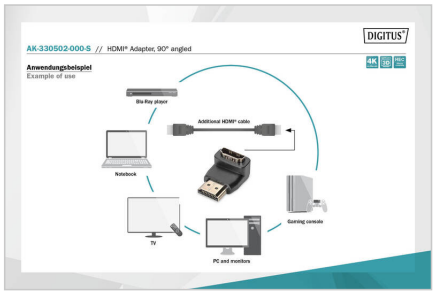

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**












**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com