

# DIGITUS® Adaptador HDMI, ângulo de 90

AK-330502-000-S  
EAN 4016032296164



**Adaptador HDMI, tipo A, ângulo de 90º St/Bu, UHD 4K@60Hz, dourado, pb**

Este adaptador 4K 60Hz e com capacidade 3D é utilizado, por exemplo, para garantir uma melhor ligação de cabos HDMI normais com fichas rectas em caso de problemas de espaço, sem dobrar os cabos desnecessariamente.

**Compatível com 4K/Ultra HD e 3D + conectividade Ethernet**


- Suporta até 4K/2K com 60Hz
- Nota do fabricante: Verifique se o adaptador permite a direção angular pretendida para a sua aplicação. Tenha em atenção a direção de encaixe no seu dispositivo.

**Attributes**

- Assortment: HDMI Cables
- Color cable: black
- Color connector: black
- Connector 1: HDMI type A, plug
- Connector 2: HDMI type A, jack
- Connector surface: nickel-plated
- HDMI Standard: Premium High Speed HDMI with Ethernet
- HDTV Standard: Ultra HD 4K
- Hoods: molded
- Packaging: Polybag
- Resolution max.: 3840 x 2160 Pixel, 60Hz
- Length: 0.02 m
- AOC - Active Optical Cable: no
- Shielding: single shielding

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 250          | 4.50        | 32.00      | 30.00      | 22.00       | 21,120.00 |
| Packaging Unit Inside        | 50           | 0.90        | 4.00       | 18.00      | 25.00       | 1,800.00  |
| Packaging Unit Single        | 1            | 0.02        | 1.50       | 7.00       | 7.50        | 78.75     |
| Net single without Packaging | 1            | 0.00        | 0.00       | 0.00       | 0.00        | 0.00      |

More images:

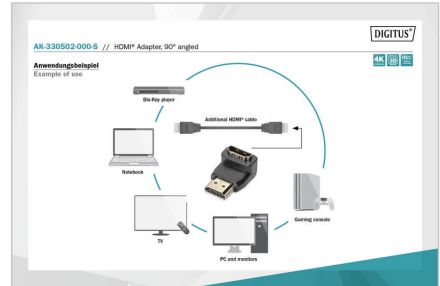

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
 info@assmann.com