


# Digitus® DVI kabelski priključak

AK-320108-010-S

EAN 4016032298274

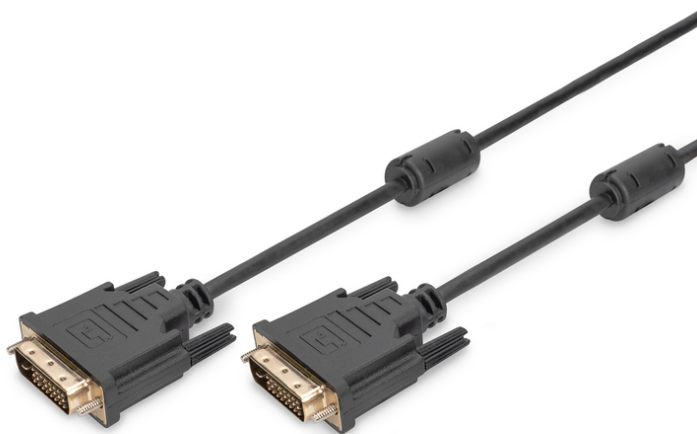

## DVI connection cable, DVI(24+1) M/M, 1.0m, DVI-D Dual Link,

Ovaj digitalni DVI kabel kompatibilan s Full HD-om (dual link) koristi se za povezivanje audio-video uređaja s DVI (24+1) sučeljem, kao što su računala, prijenosna računala, monitori, televizori ili projektori.

### Full HD, dvostruka veza

- Podržava do 2560 x 1600 piksela pri 30 Hz

### Attributes

- Asortiman: DVI kabele


- HDTV-norma: Full HD
- Kabel u boji: crni
- Kapice: ukalupljeno
- Konektor 1: DVI-D, (24+1), utikač
- Konektor 2: DVI-D, (24+1), utikač
- Konektor u boji: crni
- Površina konektora: poniklano
- rezolucija maks.: 2560 x 1600 piksela, 60 Hz
- Duljina: 1 m

## Logistics

|                                 | Number<br>(pcs) | Weight<br>(kg) | Depth<br>(cm) | Width<br>(cm) | Height<br>(cm) | cm <sup>3</sup> |
|---------------------------------|-----------------|----------------|---------------|---------------|----------------|-----------------|
| Packaging Unit Carton           | 100             | 11.00          | 38.00         | 30.00         | 22.00          | 25,080.00       |
| Packaging Unit Inside           | 10              | 1.10           | 35.00         | 29.00         | 12.00          | 12,180.00       |
| Packaging Unit Single           | 1               | 0.11           | 17.00         | 16.00         | 3.50           | 952.00          |
| Net single without<br>Packaging | 1               | 0.13           | 14.00         | 13.50         | 3.00           | 0.00            |

## More images:



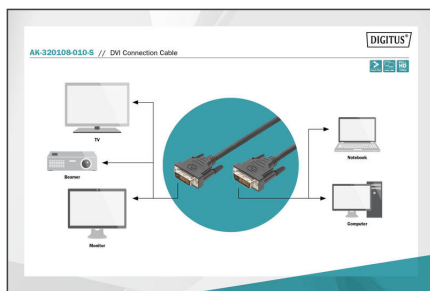

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)