# DIGITUS® DVI Connection Cable

**AK-320101-050-S**

**EAN 4016032298335**

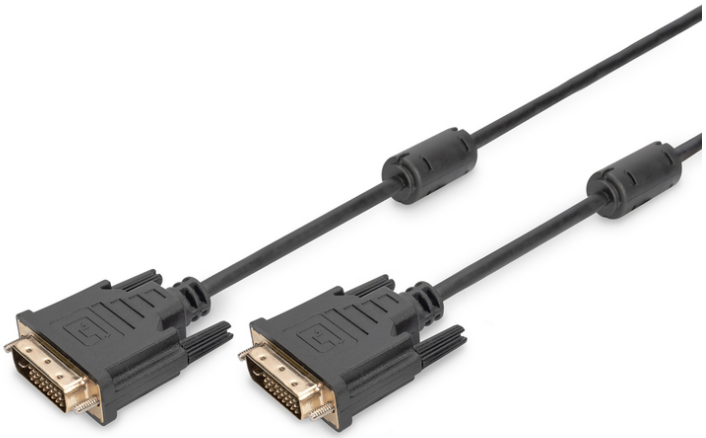

**DVI connection cable, DVI(24+1), 2x ferrit M/M, 5.0m, DVI-D Dual Link, bl**

This digital, Full HD suitable DVI cable (Dual Link), is used to connect audio/video equipment with DVI(24+1) interface, such as PC, notebook, monitor, TV or a projector, for example.

**Full HD, Dual-Link**

- Support up to 2560 x 1600 pixel with 30Hz

**Attributes**

- Assortment: DVI Cables
- AWG: 30
- Color cable: black
- Color connector: black
- Connector 1: DVI-D, (24+1), plug
- Connector 2: DVI-D, (24+1), plug
- Connector surface: nickel-plated
- Ferrite filter: 2 x ferrite beads
- HDTV Standard: Full HD
- Hoods: molded
- Packaging: Polybag
- Resolution max.: 2560 x 1600 Pixel, 60Hz
- Wire material: CU
- Length: 5 m
- Shielding: triple shielding

**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 20 | 11.60 | 38.00 | 30.00 | 30.00 | 34,200.00 |
| **Packaging Unit Inside** | 5 | 2.90 | 26.00 | 30.00 | 17.00 | 13,260.00 |
| **Packaging Unit Single** | 1 | 0.58 | 22.00 | 20.00 | 6.00 | 2,640.00 |
| **Net single without Packaging** | 1 | 0.49 | 20.00 | 18.00 | 5.50 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**






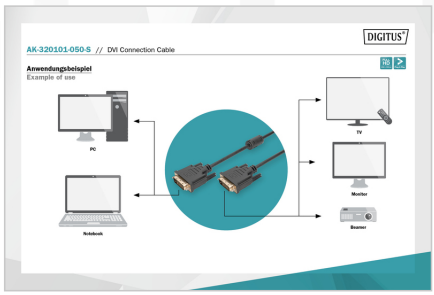





**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com