


DIGITUS® Cabo de ligação SATA

AK-400102-003-R

EAN 4016032299943

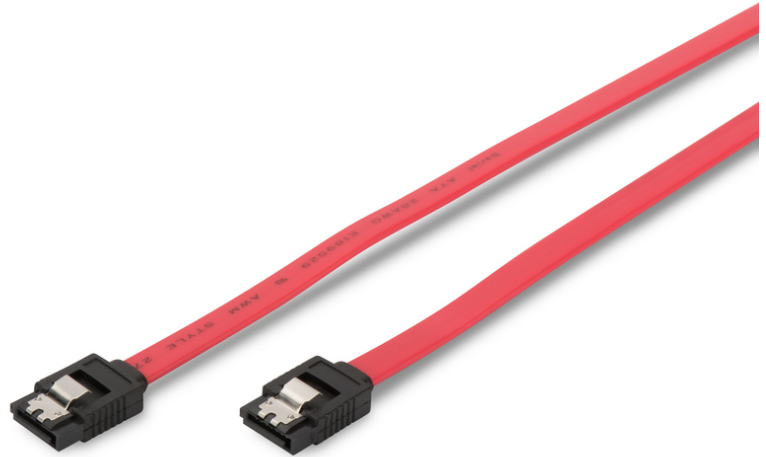

Cabo de ligação SATA, tipo L, com bloqueio Bu/Bu, 0,3 m, reto, SATA II/III, vermelho

Este cabo de dados interno é adequado, por exemplo, para ligar discos rígidos Serial ATA e gravadores/discos de CD/DVD/Blu-ray à placa-mãe e é compatível com SATA Rev. II/I

Com mecanismo de bloqueio para uma ligação segura da ficha

- Compatível com a norma Serial ATA
- Cabo de 7 núcleos, UL21149
- Peças finais rebitadas
- Assegura uma ligação segura entre o disco rígido e a placa principal
- Assegura uma ligação segura entre o disco rígido e a placa principal

Attributes

- Assortment: SATA Cables

- AWG: 26
- Color cable: red
- Color connector: black
- Connector 1: SATA (7pin) connector, L-type
- Connector 2: SATA (7pin) connector, L-type
- Data rate: 6 Gbit/s
- Hoods: molded
- Interlock: Metal latch
- Packaging: Polybag
- Style: Flat cable
- Version: SATA Revision 3
- Wire material: CU
- Length: 0.3 m
- Shielding: Unshielded

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	300	4.50	46.00	32.00	25.00	36,800.00
Packaging Unit Inside	10	0.15	13.00	5.50	17.00	1,215.50
Packaging Unit Single	1	0.02	9.50	0.50	15.00	71.25
Net single without Packaging	1	0.01	8.20	2.00	1.30	0.00

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com