

# DIGITUS® Zero-Modem Connection Cable

AK-610100-018-E

EAN 4016032301035



### Zero-Modem connection cable, D-Sub9 F/F, 1.8m, snap-hoods, be

With this cable the pins are exchanged for sending and reception. Thus a direct data exchange is possible between 2 PCs or also PC and SAT-Receiver. This enables to bring the SAT-Receiver by updates on the newest state.

### Enables a save and stable connection

- The additional screw combination in at the entrance as well as at the exit provides by the professional application for maximum security. Simply turn the screw cap in the intended socket - ready. The inattentive remove of the D-Sub plug is not possible any more.



### Attributes

- Assignment: 1-4, 2-3, 3-2, 4-1, 5-5, 7-8, 8-7, 9-9, S-S
- Assortment: Serial Cables
- Color cable: beige
- Color connector: beige
- Connector 1: DSUB, 9-pin, jack
- Connector 2: DSUB, 9-pin, jack
- Connector surface: nickel-plated
- Hoods: snap hood
- Length: 1.8 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	9.20	32.00	29.00	30.00	27,840.00
Packaging Unit Inside	10	0.92	27.00	27.00	9.00	6,561.00
Packaging Unit Single	1	0.09	26.00	14.00	3.50	1,274.00
Net single without Packaging	1	0.08	13.00	12.00	2.00	0.00

### More images:



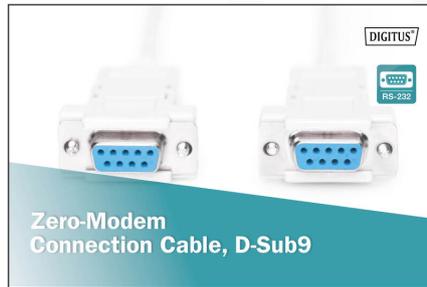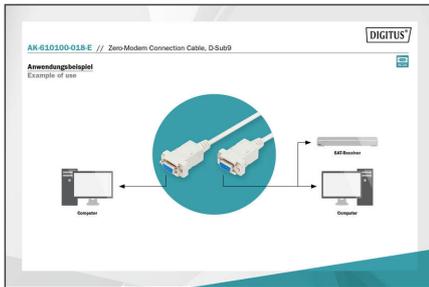

Zero-Modem  
Connection Cable, D-Sub9

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)