


DIGITUS® Cabo de ligação de modem nulo

AK-610100-018-E

EAN 4016032301035

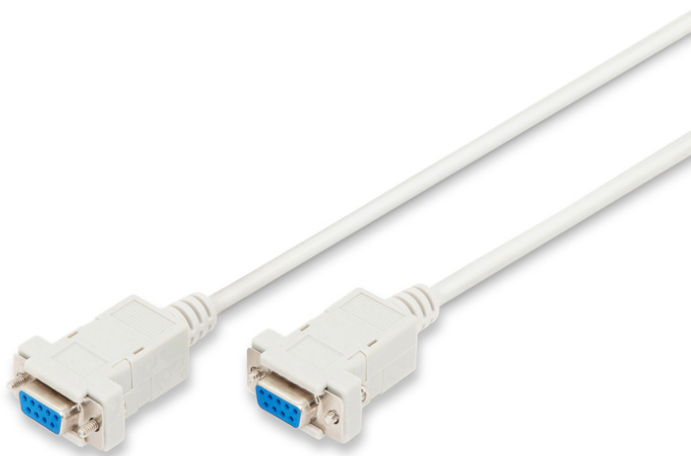

Cabo de ligação do modem zero, D-Sub9 Bu/Bu, 1,8 m, capas de encaixe, be

Neste cabo, os pinos de transmissão e receção são trocados. Isto permite a troca direta de dados entre 2 PCs ou um PC e um recetor SAT. Isto permite atualizar o recetor SAT para a versão mais recente.

Permite uma ligação segura e estável

- A ligação roscada adicional, tanto na entrada como na saída, garante a máxima segurança para uma utilização profissional. Basta enroscar a tampa de rosca no encaixe fornecido - e já está. A remoção descuidada do conetor D-Sub já não é possível.

Attributes



- Assignment: 1-4, 2-3, 3-2, 4-1, 5-5, 7-8, 8-7, 9-9, S-S
- Assortment: Serial Cables
- Color cable: beige
- Color connector: beige
- Connector 1: DSUB, 9-pin, jack
- Connector 2: DSUB, 9-pin, jack
- Connector surface: nickel-plated
- Hoods: snap hood
- Length: 1.8 m

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	100	9.20	32.00	29.00	30.00	27,840.00
Packaging Unit Inside	10	0.92	27.00	27.00	9.00	6,561.00
Packaging Unit Single	1	0.09	26.00	14.00	3.50	1,274.00
Net single without Packaging	1	0.08	13.00	12.00	2.00	0.00

More images:



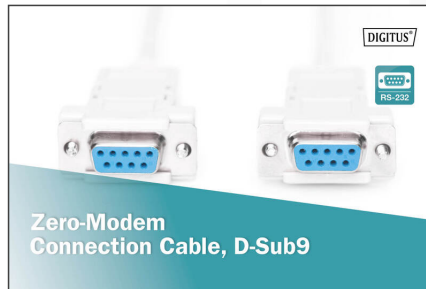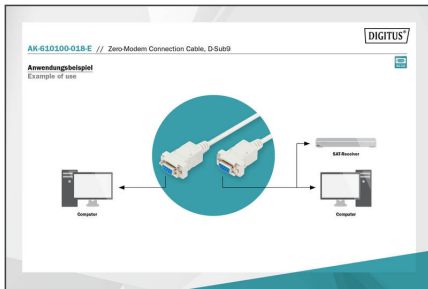

Zero-Modem
Connection Cable, D-Sub9

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com