


# DIGITUS® Cabo de ligação de modem nulo

AK-610100-030-E

EAN 4016032301042

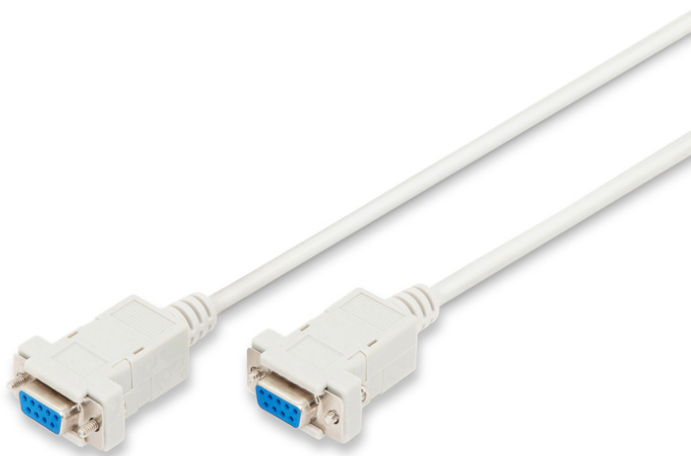

## Cabo de ligação do modem zero, D-Sub9 Bu/Bu, 3,0 m, capotas de encaixe, b

Neste cabo, os pinos de transmissão e receção são trocados. Isto permite a troca direta de dados entre 2 PCs ou um PC e um recetor SAT. Isto permite atualizar o recetor SAT para a versão mais recente.

### Permite uma ligação segura e estável

- A ligação roscada adicional, tanto na entrada como na saída, garante a máxima segurança para uma utilização profissional. Basta enroscar a tampa de rosca no encaixe fornecido - e já está. A remoção descuidada do conetor D-Sub já não é possível.


## Attributes


- Assignment: 1-4, 2-3, 3-2, 4-1, 5-5, 7-8, 8-7, 9-9, S-S
- Assortment: Serial Cables
- Color cable: beige
- Color connector: beige
- Connector 1: DSUB, 9-pin, jack
- Connector 2: DSUB, 9-pin, jack
- Connector surface: nickel-plated
- Hoods: snap hood
- Length: 3 m

## Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	50	6.90	32.00	29.00	24.00	22,272.00
Packaging Unit Inside	10	1.38	33.00	36.00	8.00	9,504.00
Packaging Unit Single	1	0.14	24.00	15.00	3.50	1,260.00
Net single without Packaging	1	0.12	16.50	13.00	3.00	0.00

## More images:

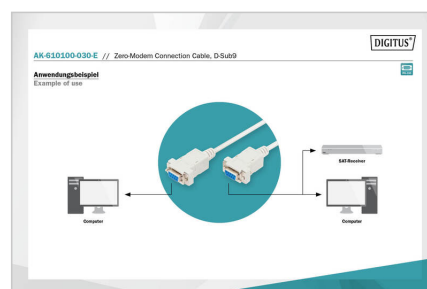

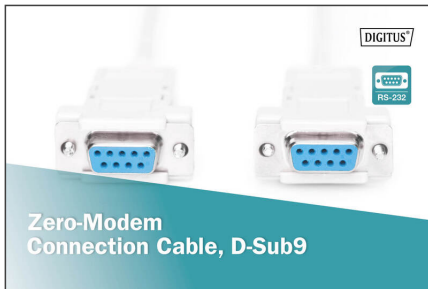

### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)