


# DIGITUS® Datatransfer connection cable, D-Sub9/F - D-Sub9/F

AK-610106-030-E

EAN 4016032301141

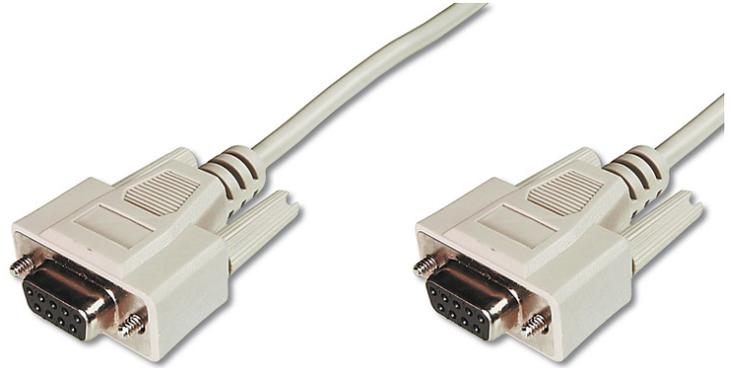

**Datatransfer connection cable, D-Sub9 F/F, 3.0m, serial, molded, be**

Datatransfer connection cable, D-Sub9,F/F, 3.0m, serial, molded, be

**Enables a save and stable connection**

**Attributes**

- Assignment: 1:1
- Assortment: Serial Cables
- AWG: 28

- Color cable: beige
- Color connector: beige
- Connector 1: DSUB, 9-pin, jack
- Connector 2: DSUB, 9-pin, jack
- Connector surface: nickel-plated
- Hoods: molded
- Wire material: CU
- Length: 3 m
- Shielding: Unshielded

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
<b>Packaging Unit Carton</b>	50	9.40	32.00	29.00	24.00	22,272.00
<b>Packaging Unit Inside</b>	10	1.88	36.00	36.00	8.00	10,368.00
<b>Packaging Unit Single</b>	1	0.19	27.00	14.00	3.50	1,323.00
<b>Net single without Packaging</b>	1	0.17	17.50	12.00	3.00	0.00

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)