


# DIGITUS® Cabo de ligação de transferência de dados, D-Sub9/St - D-Sub9/St

AK-610107-030-E  
EAN 4016032301172

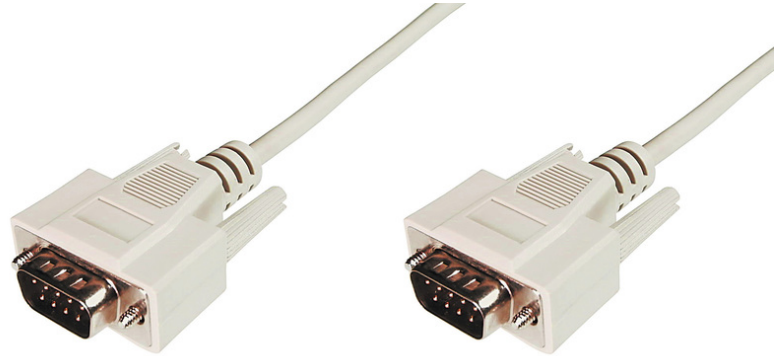

**Cabo de ligação de transferência de dados, D-Sub9 St/St, 3.0m, série, moldado, be**

Cabo de ligação de transferência de dados, D-Sub9,St/St, 3,0m, série, moldado, be

Permite uma ligação segura e estável

**Attributes**

- Assortment: Serial Cables
- AWG: 28

- Color cable: beige
- Color connector: beige
- Connector 1: DSUB, 9-pin, plug
- Connector 2: DSUB, 9-pin, plug
- Connector surface: nickel-plated
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 3 m
- Shielding: single shielding

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	100	15.00	32.00	29.00	24.00	22,272.00
Packaging Unit Inside	10	1.50	36.00	36.00	10.00	12,960.00
Packaging Unit Single	1	0.15	27.00	14.00	3.00	1,134.00
Net single without Packaging	1	0.15	27.00	14.00	3.00	0.00

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)