


## DIGITUS®

AK-610300-003-E  
EAN 4016032301509

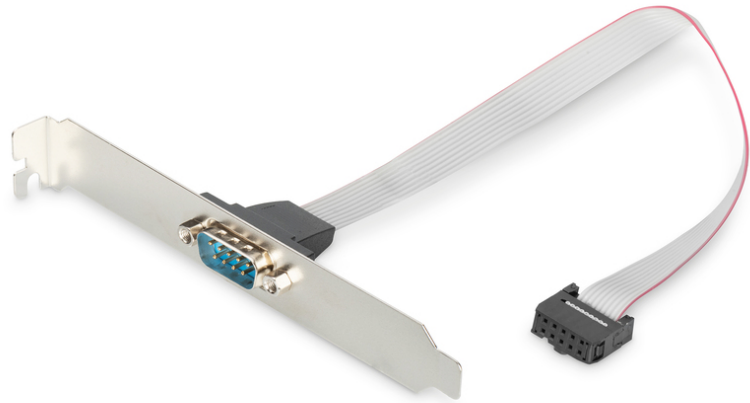

Serial Slot Bracket cable, D-Sub9 - IDC 2x5pin M/F, 0.25m, serial, DTK, be

Digitus AK-610300-003-E // Serial Slot Bracket adapter cable, D-Sub9/M - IDC 2x5pin/F


**Attributes**

- Assignment: 1-1; 6-2; 2-3; 7-4; 3-5; 8-6; 4-7; 9-8; 5-9
- Assortment: Serial and Parallel Adapters
- AWG: 26

- Color cable: beige
- Color connector: beige
- Connector 1: DSUB, 9-pin, plug
- Connector 2: Socket Connector, 10-pin
- Connector surface: nickel-plated
- Hoods: molded
- Packaging: Polybag
- Wire material: CU
- Length: 0.25 m

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	200	6.96	30.00	30.00	30.00	27,000.00
Packaging Unit Inside	10	0.35	16.50	5.00	21.00	1,732.50
Packaging Unit Single	1	0.03	10.00	1.00	13.00	130.00
Net single without Packaging	1	0.03	13.00	14.00	4.00	0.00

**More images:**

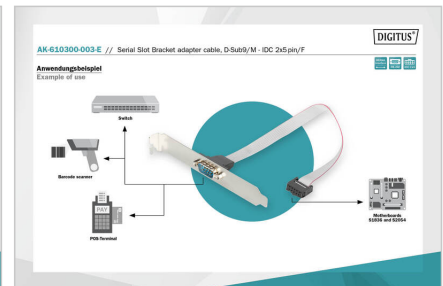



### Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

### EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)