


More images:

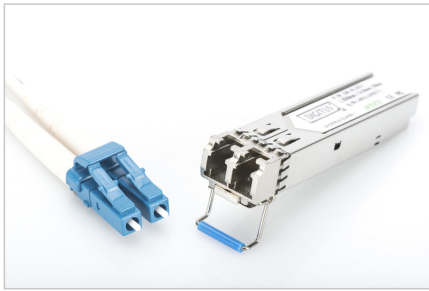

Product Number	EMC Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
Full Duplex							
Dsh1000	40100000000	10 Gbps	2 km	LC Multimode Duplex	10 Gbps	0 to 70 °C	
Dsh1002	40100000002	10 Gbps	200m	LC Duplex OM3	7.5/8.5µm/10Gbps	0 to 70 °C	
Dsh1004	40100000004	10 Gbps	200m	LC Duplex OM4	7.5/8.5µm/10Gbps	0 to 70 °C	
Single							
Dsh1006	40100000006	10 Gbps	200m	LC Multimode Duplex	10Gbps	0 to 70 °C	
Dsh1008	40100000008	10 Gbps	200m	LC Duplex OM3	10Gbps	0 to 70 °C	
Dsh1010	40100000010	10 Gbps	200m	LC Duplex OM4	7.5/8.5µm/10Gbps	0 to 70 °C	
Dsh1012	40100000012	10 Gbps	200m	LC Duplex OM3	7.5/8.5µm/10Gbps	0 to 70 °C	
Dsh1014	40100000014	10 Gbps	80 km	LC Duplex Duplex	10Gbps	0 to 70 °C	
SR							
Dsh1016	40100000016	10 Gbps	200m	LC Multimode Duplex	10Gbps	0 to 70 °C	
Dsh1018	40100000018	10 Gbps	10 km	LC Duplex Duplex	10 Gbps	0 to 70 °C	
Industrial Version							
Dsh1019	40100000019	10 Gbps	200m	LC Duplex Duplex	7.5/8.5µm/10Gbps	-40 to 85 °C	✓
Dsh1020	40100000020	10 Gbps	200m	LC Duplex Duplex	10 Gbps	-40 to 85 °C	✓
Dsh1021	40100000021	10 Gbps	200m	LC Duplex Duplex	10 Gbps	-40 to 85 °C	✓
Dsh1022	40100000022	10 Gbps	200m	LC Duplex Duplex	10Gbps	-40 to 85 °C	✓
Dsh1023	40100000023	10 Gbps	200m	LC Duplex Duplex	7.5/8.5µm/10Gbps	-40 to 85 °C	✓
Dsh1024	40100000024	10 Gbps	200m	LC Duplex Duplex	7.5/8.5µm/10Gbps	-40 to 85 °C	✓

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com