DIGITUS® mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81004

EAN 4016032305729



1.25 Gbps SFP Module, Singlemode, BiDi LC Simplex, Tx1550nm/Rx1310nm, up to 20km

The DIGITUS® mini GBIC (SFP) transceiver modules offer highest quality and reliability. Wether from switch to switch, converter to switch, converter to converter or any else application: The wide product range of DIGITUS® modules makes possible a flexible usage of the fiber technology. The conformity to the MSA (Multi Source Agreement) standard ensures a compatibility to third party manufacturers.

The plug and play fiber connection

- Mini GBIC SFP (Small Form Factor Pluggable) module
- Compatible with the following manuafacturers: Ubiquiti, Allied Telesis, Allnet, CISCO, D-Link, Edimax, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, ZyXEL, ZTE , Avaya , Mikrotik , ENTERASYS, FINISAR, FORCE 10 ,RIVERSTONE , Fortinet
- Bidirectional WDM Module - Only one fiber is needed
- High quality and excellent reliability
- 1.25 Gbps Maximum Data Rate
- Compliant to IEEE 802.3z Gigabit Standard
- Class 1 laser product compliant with EN 60825-1
- Easy plug-and-play installation
- MSA (Multi Source Agreement) compliant
- Hot pluggable
- Connector: 1x LC Simplex
- Wavelength: Tx 1550nm / Rx 1310nm
- Transmission Power: Minimum -5 dBm, Maximum 0 dBm
- Sensitivity receiving power: minimum -24 dBm
- For a Distance of up to 20km
- Suitable for 09/125µm Singlemode Fiber Cables
- Safe fast-locking mechanism
- 3.3V power supply
- Operating temperature: 0 °C ~ 70 °C

Attributes

- Mod: Jednomodni
- Priključak: LC
- Udaljenost (km): 20
- Valna duljina: 1550/1310 nm
- DDM podrška: Ne
- Kompatibilnost proizvođača: Univerzalni (MSA), Cisco
- Način emitiranja: Dvosmjerno
- Ethernet brzina: Gigabit

Package contents


- SFP module

Logistics

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	9.00	11.50	3.00	310.50
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

More images:

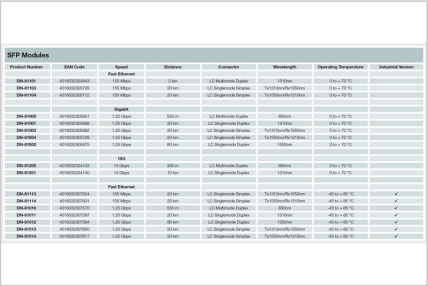

SFP Modules

Product Number	EAN Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
		Fast Ethernet					
DN-81101	4016032324343	155 Mbps	2 km	LC Multimode Duplex	1310 nm	0 to + 70 °C	
DN-81103	4016032305716	155 Mbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	0 to + 70 °C	
DN-81104	4016032305112	155 Mbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	0 to + 70 °C	
		Gigabit					
DN-81000	4016032305651	1.25 Gbps	550 m	LC Multimode Duplex	850 nm	0 to + 70 °C	
DN-81001	4016032305996	1.25 Gbps	20 km	LC Singlemode Duplex	1310 nm	0 to + 70 °C	
DN-81003	4016032305682	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	0 to + 70 °C	
DN-81004	4016032305729	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	0 to + 70 °C	
DN-81002	4016032305675	1.25 Gbps	80 km	LC Singlemode Duplex	1550nm	0 to + 70 °C	
		10G					
DN-81200	4016032324133	10 Gbps	300 m	LC Multimode Duplex	850 nm	0 to + 70 °C	
DN-81201	4016032324140	10 Gbps	10 km	LC Singlemode Duplex	1310 nm	0 to + 70 °C	
		Fast Ethernet					
DN-81113	4016032307024	155 Mbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	-45 to + 85 °C	✓
DN-81114	4016032307031	155 Mbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	-45 to + 85 °C	✓
DN-81010	4016032307572	1.25 Gbps	550 m	LC Multimode Duplex	850 nm	-45 to + 85 °C	✓
DN-81011	4016032307587	1.25 Gbps	20 km	LC Singlemode Duplex	1310 nm	-45 to + 85 °C	✓
DN-81012	4016032307594	1.25 Gbps	80 km	LC Singlemode Duplex	1550 nm	-45 to + 85 °C	✓
DN-81013	4016032307600	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1310nm/Rx1550nm	-45 to + 85 °C	✓
DN-81014	4016032307617	1.25 Gbps	20 km	LC Singlemode Simplex	Tx1550nm/Rx1310nm	-45 to + 85 °C	✓

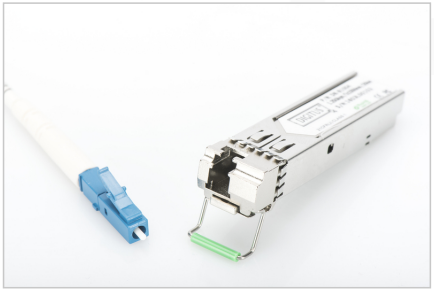



Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com