

DIGITUS® Módulo industrial mini GBIC (SFP), 1,25 Gbps, 0,55 km

DN-81010

EAN 4016032307570



Módulo SFP de 1,25 Gbps, multimodo, ver. indústria Conector LC duplex, 850nm, até 550m

Os módulos transceptores DIGITUS® Mini GBIC (SFP) oferecem a mais elevada qualidade e fiabilidade. Quer seja de comutador para comutador, conversor para comutador, conversor para conversor ou outras possibilidades de aplicação alargadas: A grande variedade de módulos DIGITUS® permite-lhe utilizar a tecnologia de fibra ótica de forma flexível. A conformidade com a norma MSA (Multi Source Agreement) assegura a compatibilidade com fabricantes terceiros.

A ligação de fibra ótica "plug and play"

- Módulo Mini GBIC SFP (Small Form Fator Pluggable)
- Compatível com os seguintes fabricantes: Allied Telesis, Allnet, Avaya, CISCO, D-Link, Edimax, FINISAR, FORCE 10, Gigamon Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Alta qualidade e máxima fiabilidade
- Débito máximo de dados de 1,25 Gbps
- Em conformidade com a norma IEEE 802.3z Gigabit
- Produto laser de classe 1 de acordo com a norma EN 60825-1
- Fácil instalação plug and play
- Compatível com MSA (Multi Source Agreement)
- Ligável a quente

- Ligação: 1x LC Duplex
- 1000Base-SX - Para distâncias curtas
- Comprimento de onda: 850nm
- Potência de transmissão: mínimo -8 dBm, máximo -3 dBm
- Sensibilidade de receção: Mínimo -20 dBm
- Para uma distância de até 0,55 km
- Adequado para cabos de fibra ótica multimodo 50/125µm e 62,5/125µm
- Mecanismo seguro de libertação rápida
- Fonte de alimentação de 3,3 V
- Temperatura de funcionamento: -40 °C - +85 °C

Attributes


- Mode: Multimode
- Connector: LC
- Distance (km): 0.5
- Wavelength: 850 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Fast Ethernet

Package contents

- Módulo SFP

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	240	8.50	56.00	39.00	25.00	54,600.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	10.00	7.00	2.00	140.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

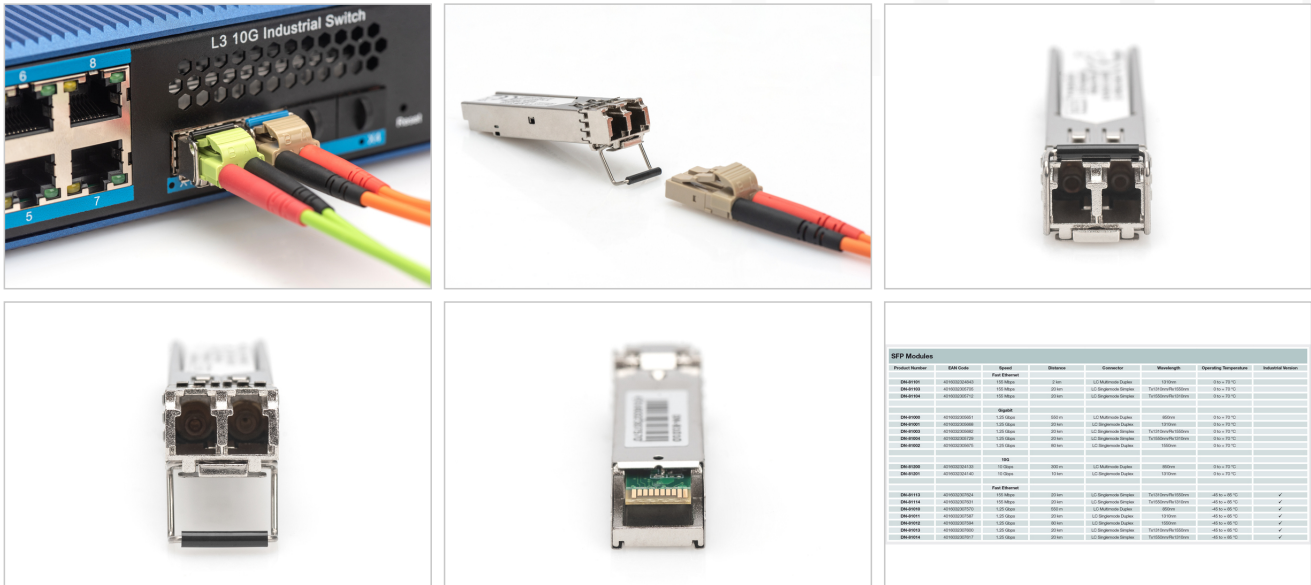

SFP Modules							
Product Number	MM Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
DM-0101	42700000000	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	
DM-0102	42700000010	1.0 Gbps	20 km	LC Duplex Duplex	1550nm	0 to 70 °C	
DM-0104	42700000070	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	
DM-0105	42700000080	1.0 Gbps	20 km	LC Duplex Duplex	1550nm	0 to 70 °C	
DM-0106	42700000090	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	
DM-0107	42700000100	1.0 Gbps	20 km	LC Duplex Duplex	1550nm	0 to 70 °C	
DM-0108	42700000110	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	
DM-0109	42700000120	1.0 Gbps	20 km	LC Duplex Duplex	1550nm	0 to 70 °C	
DM-0110	42700000130	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	
DM-0111	42700000140	1.0 Gbps	20 km	LC Duplex Duplex	1550nm	0 to 70 °C	
DM-0112	42700000150	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	
DM-0113	42700000160	1.0 Gbps	20 km	LC Duplex Duplex	1550nm	0 to 70 °C	
DM-0114	42700000170	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	
DM-0115	42700000180	1.0 Gbps	20 km	LC Duplex Duplex	1550nm	0 to 70 °C	
DM-0116	42700000190	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	
DM-0117	42700000200	1.0 Gbps	20 km	LC Duplex Duplex	1550nm	0 to 70 °C	
DM-0118	42700000210	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	
DM-0119	42700000220	1.0 Gbps	20 km	LC Duplex Duplex	1550nm	0 to 70 °C	
DM-0120	42700000230	1.0 Gbps	20 km	LC Duplex Duplex	1310nm	0 to 70 °C	

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com