


DIGITUS® Industrial mini GBIC (SFP) Module, 1.25 Gbps, 20km

DN-81011

EAN 4016032307587

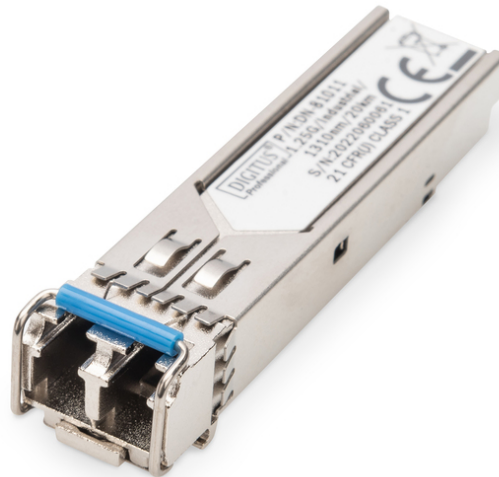

1.25 Gbps SFP Module, Singlemode, Industrial vers. LC Duplex Connector, 1310nm, up to 20km

Digitus® Mini GBIC (SFP) Module is a high-performance, single-mode optical transceiver module designed for industrial applications. It supports a data rate of 1.25 Gbps and a maximum distance of 20 km. The module is compatible with various network equipment and is designed for easy installation and operation.

Plug and Play

- Mini GBIC SFP (Industrial vers. LC Duplex Connector, 1310nm, up to 20km)
- Compatible with various network equipment: Allied Telesis, Avaya, CISCO, D-Link, Edimax, FINISAR, Hirschmann, Infortium, NetScout, Omnicast, Ruckus, SMC, TP-Link, TRENDnet, Mikrotik, ENTERASYS, RIVERSTONE, Unifi, Ubiquiti, ZyXEL, ZTE
- Supports data rate: 1.25 Gbps/100Mbps
- Supports wavelength: 1310nm
- Supports distance: up to 20km
- Supports IEEE 802.3z
- Supports EN 60825-1
- Supports Plug and Play
- Supports MSA (Multi-Source Agreement)
- Supports LC connector
- Supports 1000Base-LX - Singlemode LC connector


- Wavelength: 1310 nm
- Connector: LC Duplex
- Distance (km): 20
- Wavelength: 1310 nm
- DDM Support: no
- Broadcasting Mode: Unidirectional
- Manufacturer compatibility: Universal (MSA), Cisco
- Ethernet speed: Gigabit

Package contents

- 1 x SFP

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	240	8.50	50.00	29.00	54.50	79,025.00
Packaging Unit Inside	30	1.06	7.00	20.00	30.00	4,200.00
Packaging Unit Single	1	0.04	3.00	12.00	9.00	324.00
Net single without Packaging	1	0.00	0.00	0.00	0.00	0.00

More images:

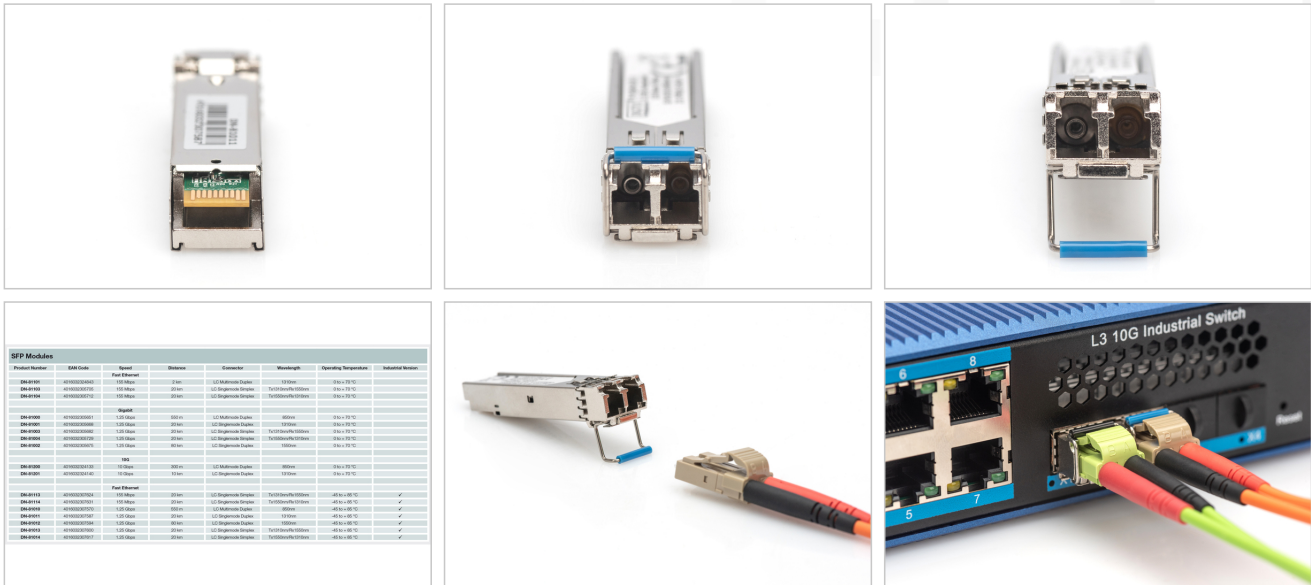

Product Number	SKU Code	Speed	Distance	Connector	Wavelength	Operating Temperature	Industrial Version
294-0100	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm	0 to 70 °C	✓
294-0101	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm/PLC/1550nm	0 to 70 °C	✓
294-0104	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm/PLC/1550nm	0 to 70 °C	✓
294-0105	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm	0 to 70 °C	✓
294-0106	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm	0 to 70 °C	✓
294-0107	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm/PLC/1550nm	0 to 70 °C	✓
294-0108	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm/PLC/1550nm	0 to 70 °C	✓
294-0109	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm	0 to 70 °C	✓
294-0110	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm	0 to 70 °C	✓
294-0111	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm/PLC/1550nm	0 to 70 °C	✓
294-0112	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm/PLC/1550nm	0 to 70 °C	✓
294-0113	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm	0 to 70 °C	✓
294-0114	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm	0 to 70 °C	✓
294-0115	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm/PLC/1550nm	0 to 70 °C	✓
294-0116	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm/PLC/1550nm	0 to 70 °C	✓
294-0117	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm	0 to 70 °C	✓
294-0118	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm	0 to 70 °C	✓
294-0119	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm/PLC/1550nm	0 to 70 °C	✓
294-0120	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm/PLC/1550nm	0 to 70 °C	✓
294-0121	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm	0 to 70 °C	✓
294-0122	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm	0 to 70 °C	✓
294-0123	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1310nm/PLC/1550nm	0 to 70 °C	✓
294-0124	401000000000	1.0 Gbps	20 km	LC Duplex OM3	1550nm/PLC/1550nm	0 to 70 °C	✓

Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com