# DIGITUS® Fiber Optic Multimode Patch Cord, OM4, SC / SC

**DK-2522-02-4**

**EAN 4016032308867**



**FO patch cord, duplex, SC to SC MM OM4 50/125 µ, 2 m**

FO patch cord, duplex, SC to SC,MM OM4 50/125 µ, 2 m

**Future-oriented standards and high-end quality for your network.**

- Duplex cable
- LSOH
- Connector with ceramic ferrule
- Cable diameter 2 mm
- Single packed with test-report
- Color: RAL 4003

**Attributes**


- Assortment: Fiber Optic Patch Cables
- Boot: two-color
- Cable diameter: 2 mm
- Cable jacket: LSOH
- Cable type: I-VH 2G50/125µ
- Color cable: erika violet
- Connector 1: SC
- Connector 2: SC
- Fiber class: OM4
- Fiber diameter: 50/125µ
- Mode: Multimode
- Packaging: DIGITUS Polybag
- Length: 2 m


**Logistics**

| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
|---|---|---|---|---|---|---|
| **Packaging Unit Carton** | 120 | 9.38 | 41.00 | 41.00 | 28.00 | 47,068.00 |
| **Packaging Unit Inside** | 20 | 1.56 | 19.00 | 19.00 | 12.00 | 4,332.00 |
| **Packaging Unit Single** | 1 | 0.08 | 17.00 | 17.00 | 1.00 | 289.00 |
| **Net single without Packaging** | 1 | 0.05 | 15.00 | 15.00 | 1.00 | 0.00 |


Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.

**More images:**

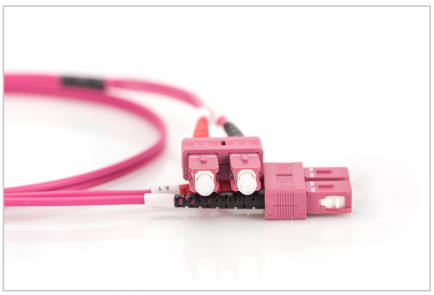

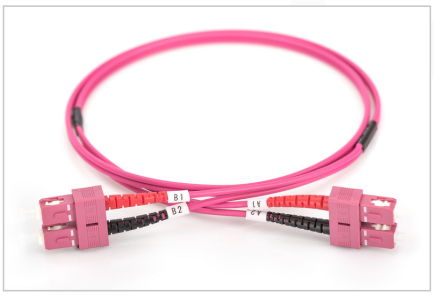



| | | | | |
|---|---|---|---|---|
| Part No. | DK-2522-02-4 | | | |
| Lenght | 2 m | | | |
| Cable Type | Duplex MM 50/125 | | OM4 LSZH | |
| | END A | | END B | |
| Connector Type | SC | | SC | |
| Insertion Loss (dB) | 0.11 | 0.05 | 0.11 | 0.11 |
| Return Loss (dB) | 30.5 | 32 | 33.2 | 35.8 |
| Q.C. | PASS | | | |

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com