


DIGITUS® PCI Gigabit Ethernet

DN-10110

EAN 4016032310778

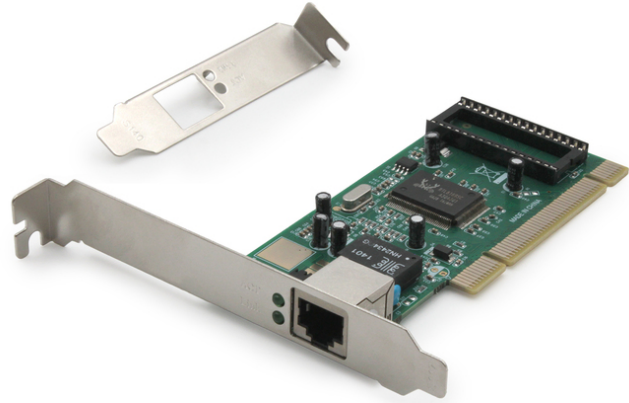

Gigabit Ethernet PCI Card 32-bit, low profile bracket, RTL8169SC chipset

Gigabit Ethernet PCI Card, 32-bit, low profile bracket, RTL8169SC chipset




- 10/100/1000 Mbps Ethernet
- IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- IEEE 802.3x IEEE 802.3x
- Realtek
- PCI 2.1 & 2.2


- Operating Temperature: 0-70 °C
- Operating Voltage: 5V
- Power Consumption: 10/100/1000 Mbps

- Package contents: 1x PCI Gigabit Ethernet card, 1x Low profile bracket

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm ³
Packaging Unit Carton	40	6.30	38.00	41.00	41.00	63,878.00
Packaging Unit Inside	1	0.16	5.50	18.00	18.60	1,841.40
Packaging Unit Single	1	0.16	5.50	18.00	18.60	1,841.40
Net single without Packaging	1	0.05	12.10	11.50	1.90	0.00

More images:

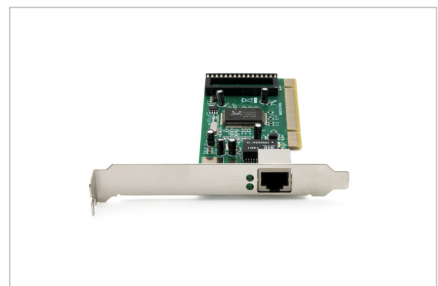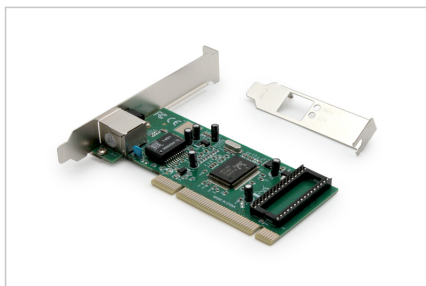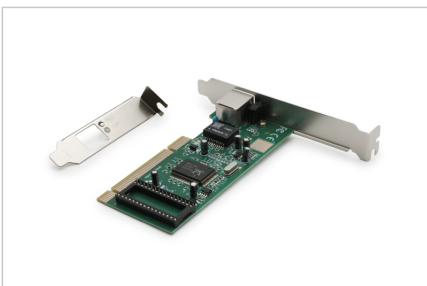

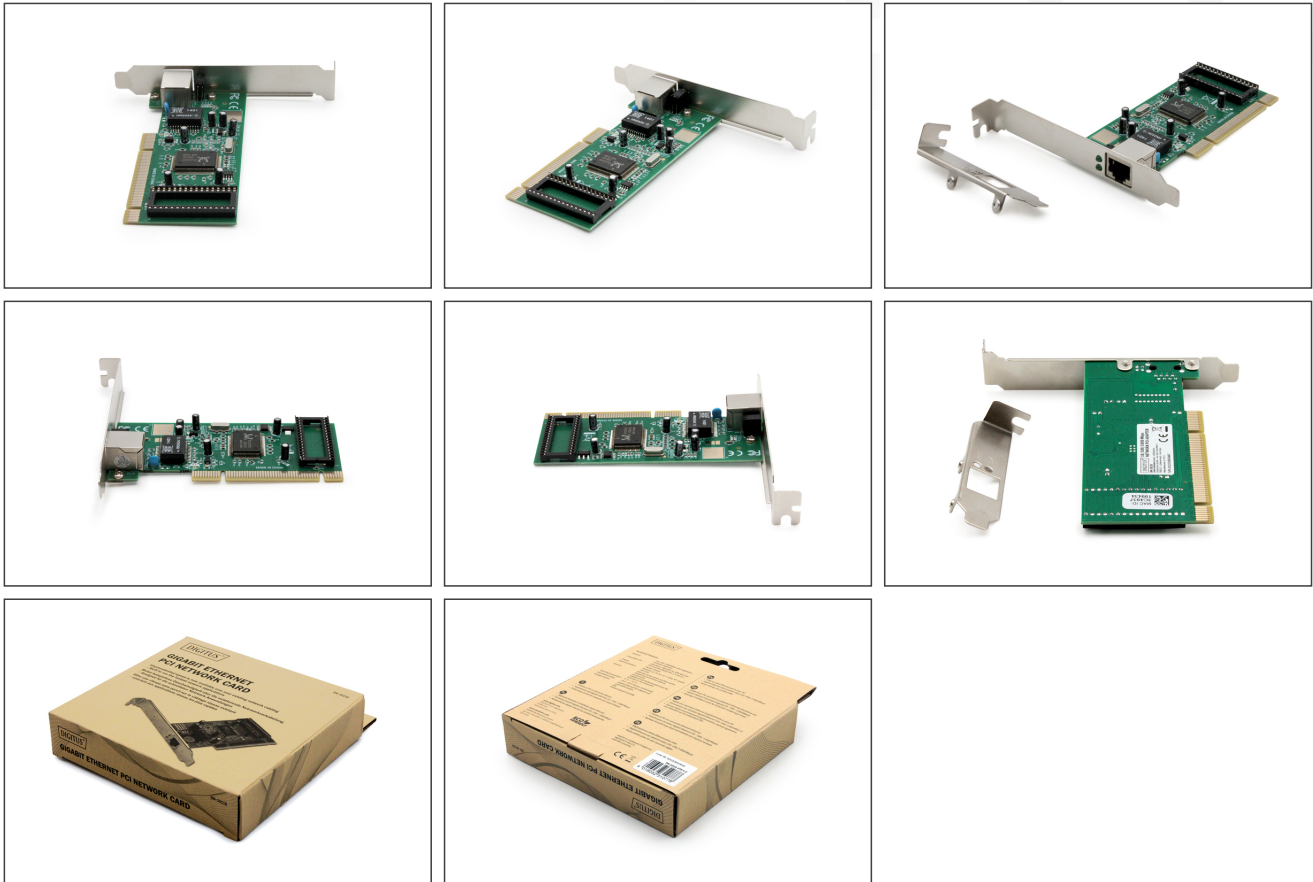

Safety notes

- Switch off the computer completely and disconnect it from the power supply before installing or removing the network card.
- Static discharge can damage the product or the PC. Take measures against static discharge (ESD) when installing the product, e.g. wear an antistatic wrist strap.
- Before installation, touch the metal surface of the PC housing or another grounded object to ground any ESD charge via the housing.
- Avoid using too much force when connecting the product to the PC.
- Please ensure that any cables are connected correctly without overstressing or damaging them.
- Avoid touching the contacts of the product with your fingers to prevent corrosion or static charge.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com