


# DIGITUS® Mains cable

AK-440100-018-S  
EAN 4016032311713

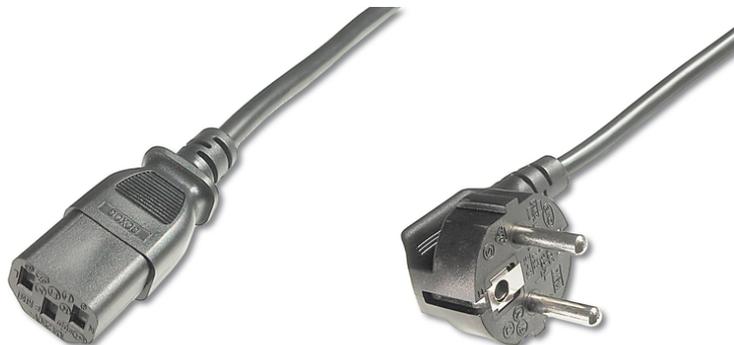

**Power Cord, CEE 7/7 (Typ-F) 90° angled - C13 M/F, 1.8m, H05VV-F3G 0.75qmm, black**

This power cable is used to connect a PC or monitor to the household power supply (socket).

**European country approvals**

- VDE tested

**Attributes**

- Asortiman: Kabeli za spajanje uređaja
- Kabel u boji: crni

- Kabelska norma: H05 VV F3G
- Kapice: ukalupljeno
- Konektor 1: CEE 7/7, utikač
- Konektor 2: IEC C13, priključak
- Konektor u boji: crni
- Materijal žice: CU
- Površina konektora: poniklano
- Presjek voda: 0,75 qmm
- Strujni kapacitet opterećenja: 250 V/10 A
- Duljina: 1.8 m
- oklop: bez oklopa

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	70	14.72	55.00	36.20	20.00	39,820.00
Packaging Unit Inside	10	2.10	13.00	26.00	6.50	2,197.00
Packaging Unit Single	1	0.21	3.50	13.00	15.00	682.50
Net single without Packaging	1	0.19	13.00	11.60	3.00	0.00

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)