


# DIGITUS UK сетевой кабель питания

AK-440107-018-S  
EAN 4016032311966

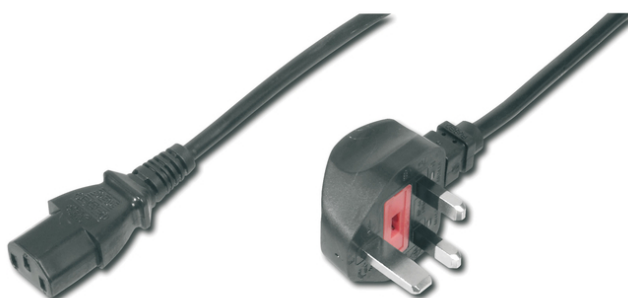

**Power Cord, UK plug, 90° angled - C13 M/F, 1.8m, H05VV-F3G 0.75qmm, fuse 5A, black**

Этот кабель питания используется для подключения ПК или мониторов к британской внутренней сети электропроводки (розетке).

## Европейская сертификация

### Attributes

- Assortment: Device Connection Cables
- Cable standard: H05 VV F3G

- Color cable: black
- Color connector: black
- Connector 1: BS 1363, plug
- Connector 2: IEC C13, jack
- Connector surface: nickel-plated
- Current load capacity: 250V/10A
- Fuse: 5A fuse
- Hoods: molded
- Lead cross-section: 0.75qmm
- Length: 1.8 m
- Shielding: Unshielded

| Logistics                    |              |             |            |            |             |           |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------|
|                              | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³       |
| Packaging Unit Carton        | 60           | 14.00       | 55.00      | 37.00      | 21.00       | 42,735.00 |
| Packaging Unit Inside        | 10           | 2.33        | 27.00      | 15.00      | 29.00       | 11,745.00 |
| Packaging Unit Single        | 1            | 0.23        | 16.00      | 2.00       | 19.00       | 608.00    |
| Net single without Packaging | 1            | 0.20        | 14.00      | 13.00      | 3.50        | 0.00      |

## Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

## EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)