
# DIGITUS® □□□□□□-□□□□□□□ □□ 12 □□□□□□□□□□ □□□□□□□, □□

**A-96933-02-UPC**

**EAN 4016032319160**

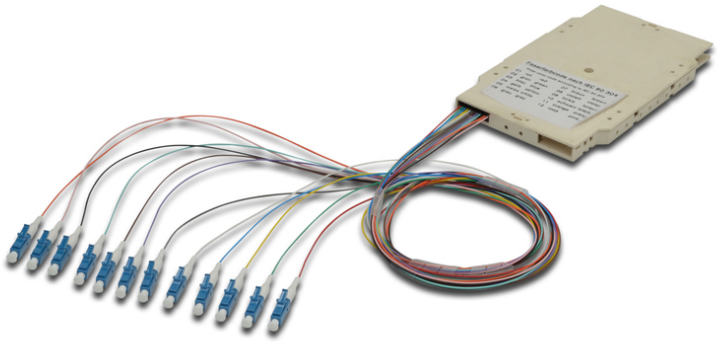

**FO splice cassette with 12 colored pigtails LC (UPC), SM OS2 09/125 œ, LSZH**


□□□□□□□□ □□□□□□□□□□ □□□□□□□□ □ □□□□ □□□□□□□□□□□□□□□□□□ □□□□□□□□□ □□□□□□□ □□□□□□ □□□□□□□□□□□ □□□□□□ □ □□□□□□□□□□□□□ □ □□□□□□□□□□□□□□ □ □□□□□□□□

□□□□□□□□ □□□□□□□□□□□□□, □□□□□□□□□□ □□□□□□□□ □□□□□□□□□□ □□□□□□□

- □□□□□□□-□□□□□□□□ □□ 12 □□□□□□□□□□□□ □□□□□□□□; □□□□□□□□ □□□□□□□□
- □□□□□□□□□□ LC (UPC ); □□□□□□□□□□□□□□ 9/125µ
- □□□□□□□□ □□□□□□□□□□□□□□□: LSOH
- □□□□□□□□□□ □□□□□□

| Logistics | | | | | | |
|---|---|---|---|---|---|---|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm³ |
| Packaging Unit Carton | 30 | 13.50 | 37.50 | 31.50 | 64.00 | 75,600.00 |
| Packaging Unit Inside | 1 | 0.45 | 3.00 | 32.00 | 31.00 | 2,976.00 |
| Packaging Unit Single | 1 | 0.45 | 3.00 | 32.00 | 31.00 | 2,976.00 |
| Net single without Packaging | 1 | 0.00 | 0.00 | 0.00 | 0.00 | 0.00 |

**More images:**

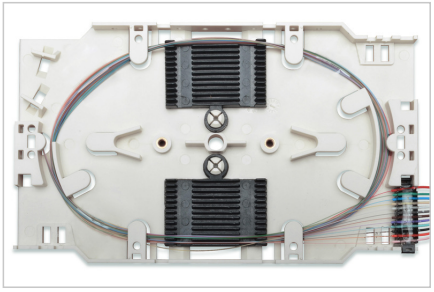

**Safety notes**

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.

- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.
- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
Auf dem Schüffel 3
Lüdenscheid, Germany
https://www.assmann.com
info@assmann.com