


# DIGITUS Сплайс-кассета на 12 оптических волокон, заранее собрана, LC, волокна OM4

A-96533-02-UPC-4  
EAN 4016032319368

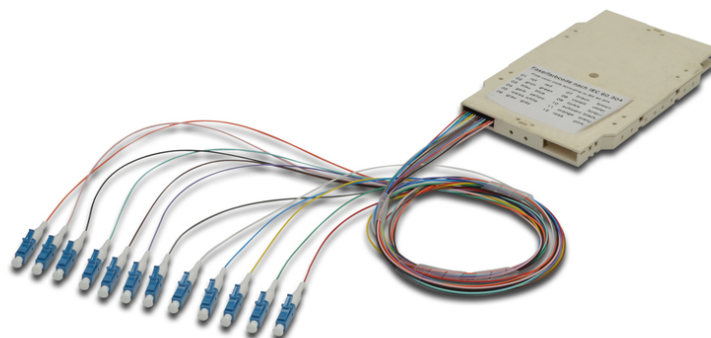

## FO splice cassette with 12 colored pigtails LC (UPC), MM OM4 50/125 æ, LSZH

Заранее собранные кассеты с уже подготовленными выводами кабеля имеют подходящую длину и расположены в соответствии с цветовым кодом IEC 60 304. Маркировка наверху кассеты показывает, какой цветовой код был использован для вывода кабелей. Каждая кассета содержит протокол проверки для соответствующих выводов кабеля и гарантирует таким образом


лучшее качество и оптимальную работу Вашей сети.

### Быстрое подключение, благодаря готовым монтажным шнурам

- Сплайс-кассета на 12 оптических волокон; заранее собрана
- Коннектор LC (UPC); многомодовый 50/125µ на базе волокон OM4
- цветные переходники; LSOH
- свободный буфер

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	9.81	31.50	60.00	41.00	77,490.00
Packaging Unit Inside	1	0.25	3.00	31.50	30.50	2,882.25
Packaging Unit Single	1	0.25	29.00	29.00	1.50	1,261.50
Net single without Packaging	1	0.12	0.00	0.00	0.00	0.00

### More images:

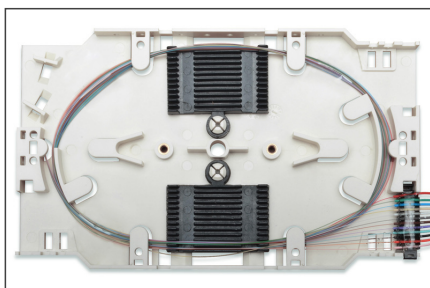

### Safety notes

- Avoid direct contact with light sources: Fiber optic cables, especially those with active light sources such as lasers (e.g. in optical communication systems), can emit dangerous radiation that can damage
- eyes. Take care never to look directly into the light of an optical fiber, even if the light source is invisible to the naked eye.
- When working with fiber optic cables, especially during tests or when working with lasers, protective goggles should always be worn to protect against harmful radiation.

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Do not kink or crush: Fiber optic cables are sensitive to mechanical stress.
- To protect cables from physical damage, they should be laid in special ducts or with protective materials
- Keep cable connectors clean: Fiber optic cables are sensitive to dust and dirt. Even small particles on the connectors can severely impair the signal quality.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product specifications for the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)