

# DIGITUS® CAT 6 S/FTP patch cable

DK-1644-0025

EAN 4016032321477



## CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.25 m, color grey

Digitus® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.25 m, color grey. This patch cord is designed for high-speed data transmission and is compliant with the ISO/IEC 11801 standard. It features a modular RJ45 (8P8C) connector on both ends, making it easy to connect to standard network ports. The cable is constructed with 4 x 2 AWG 27/7 twisted pairs, providing excellent performance and reliability. The outer jacket is made of LSZH (Low Smoke Zero Halogen) material, ensuring safety in case of fire. The cable is available in a length of 0.25 meters and is packaged in a blister pack of 10 units.





- 2 RJ45 (8P8C)
- LSZH (Low Smoke Zero Halogen) jacket, flame retardant and self-extinguishing
- Shielded twisted pair (STP) construction
- Conductor material: Copper (Cu)

### Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Blister Pack
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 0.25 m
- Color: grey
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	250	5.40	38.00	29.00	18.00	19,836.00
Packaging Unit Inside	10	0.22	5.20	22.00	28.00	3,203.20
Packaging Unit Single	1	0.02	1.60	11.50	21.00	386.40
Net single without Packaging	1	0.02	25.00	1.20	1.30	0.00

**More images:**

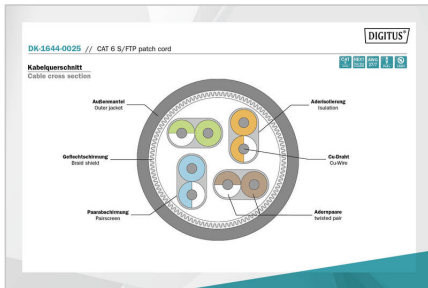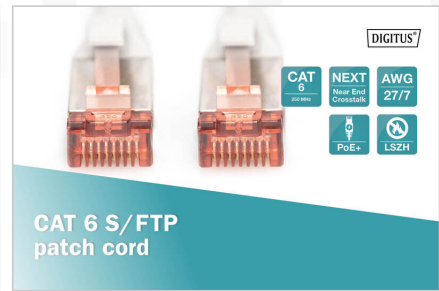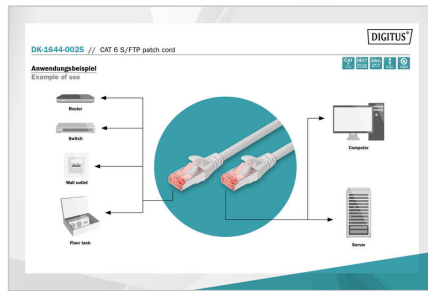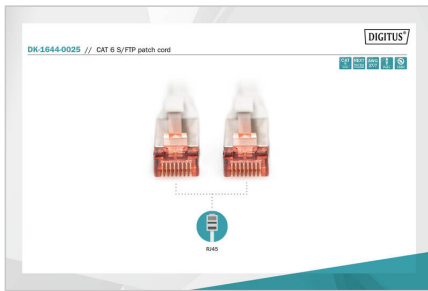

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
Auf dem Schüffel 3  
Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)