

DIGITUS® CAT 6 S/FTP patch cable

DK-1644-0025/BL
EAN 4016032321491



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.25 m, color black

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.25 m, color black. This is a 250m long, black, LSZH jacketed patch cord with two RJ45 (8P8C) modular connectors. The cable is made of copper (Cu) and is shielded with S-FTP (Shielded Foiled Twisted Pair) technology. The shielding consists of pairs in metal foil and braid shielding. The cable is 0.25m long and is made of LSZH (Low Smoke Zero Halogen) jacket. The cable is 4 x 2 AWG 27/7, twisted pair. The flat version is no. The configuration is 1:1. The connector 1 is a modular RJ45 (8/8) plug. The connector 2 is a modular RJ45 (8/8) plug. The package is Digitus Polybag. The category is CAT 6. The length is 0.25 m. The color is black. The jacket is LSZH. The slim version is no. The structure is 4 x 2 AWG 27/7, twisted pair. The flat version is no.





- 2 RJ45 (8P8C)
- LSZH jacket, LSZH AWG 27/7, length 0.25 m, color black
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Package: Digitus Polybag
- Category: CAT 6
- Length: 0.25 m
- Color: black
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	250	5.80	36.00	36.00	22.00	28,512.00
Packaging Unit Inside	10	0.23	5.20	22.00	28.00	3,203.20
Packaging Unit Single	1	0.02	1.60	11.50	21.00	386.40
Net single without Packaging	1	0.02	25.00	1.20	1.30	0.00

More images:

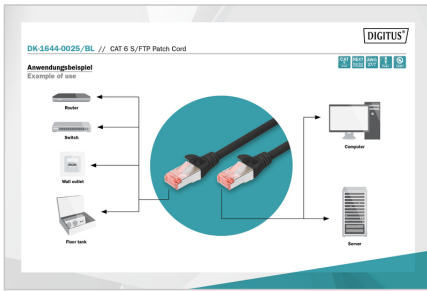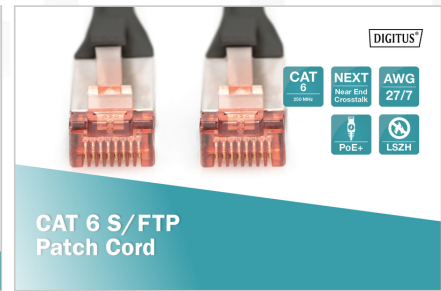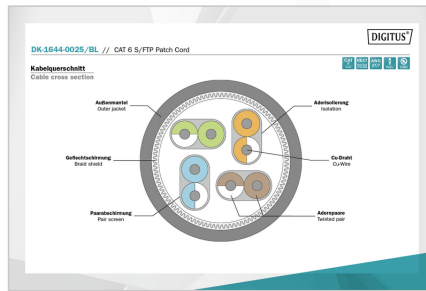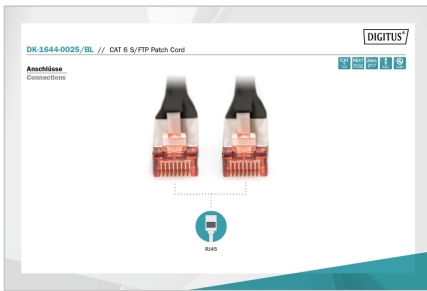

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com