

DIGITUS® CAT 6 S/FTP patch cable

DK-1644-005/WH
EAN 4016032321606



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.5 m, color white

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.5 m, color white. This is a high-speed network cable designed for use in Cat 6 networks. It features a twisted pair structure and is suitable for applications requiring high bandwidth and low latency. The cable is made of copper (Cu) and is shielded with foil and braid (S-FTP). The length is 0.5 meters and the color is white. The cable is made of LSZH (Low Smoke Zero Halogen) material, which is fire-resistant and does not release toxic fumes when burned. The cable is made of LSZH material and is suitable for use in environments where fire safety is a concern. The cable is made of LSZH material and is suitable for use in environments where fire safety is a concern. The cable is made of LSZH material and is suitable for use in environments where fire safety is a concern.





- 2 RJ45 (8P8C)
- LSZH (Low Smoke Zero Halogen) material, fire-resistant, does not release toxic fumes when burned
- Shielded S-FTP, pairs in metal foil and braid shielding
- Length: 0.5 m
- Color: white
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digital 100% Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 0.5 m
- Color: white
- Jacket: LSZH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Attributes

| Logistics | | | | | | |
|------------------------------|--------------|-------------|------------|------------|-------------|-----------------|
| | Number (pcs) | Weight (kg) | Depth (cm) | Width (cm) | Height (cm) | cm ³ |
| Packaging Unit Carton | 180 | 5.70 | 36.00 | 36.00 | 22.00 | 28,512.00 |
| Packaging Unit Inside | 10 | 0.32 | 5.20 | 22.00 | 28.00 | 3,203.20 |
| Packaging Unit Single | 1 | 0.03 | 1.60 | 11.50 | 21.00 | 386.40 |
| Net single without Packaging | 1 | 0.02 | 50.00 | 1.20 | 1.30 | 0.00 |

More images:

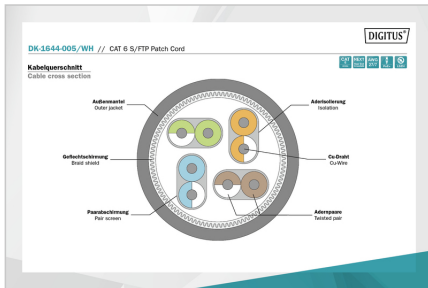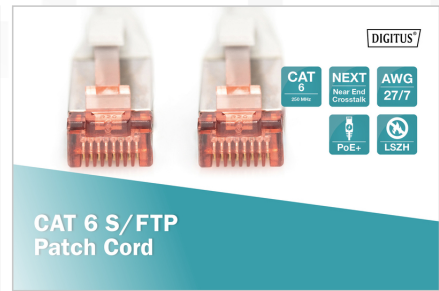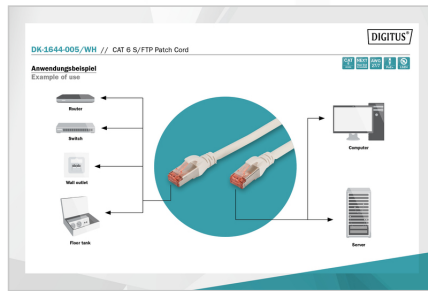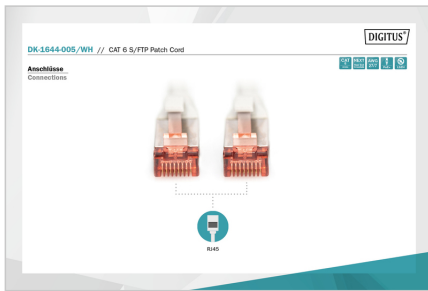

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com