


# DIGITUS® CAT 6 S/FTP patch cable

DK-1644-005/Y

EAN 4016032321613

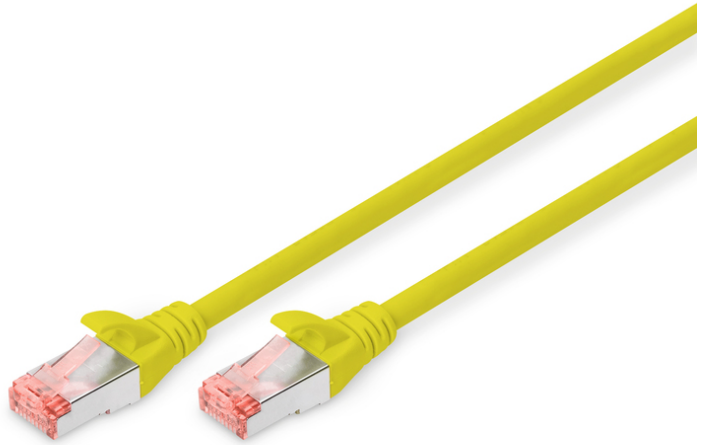

### CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.5 m, color yellow

DIGITUS® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 0.5 m, color yellow. This is a high-speed data transmission cable that meets the requirements of the ISO/IEC 11801 standard. The cable is made of copper (Cu) and has a length of 0.5 m. It is designed for use in network environments where high-speed data transmission is required. The cable is made of LSZH (Low Smoke Zero Halogen) material, which is safe for use in fire-prone environments. The cable is made of AWG 27/7 twisted pair and is designed for use in network environments where high-speed data transmission is required. The cable is made of LSZH (Low Smoke Zero Halogen) material, which is safe for use in fire-prone environments. The cable is made of AWG 27/7 twisted pair and is designed for use in network environments where high-speed data transmission is required.




- 2 RJ45 (8P8C)
- LSZH (Low Smoke Zero Halogen) material, safe for use in fire-prone environments
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Material: Copper (Cu)

### Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Digitus Polybag
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 0.5 m
- Color: yellow
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	180	5.70	36.00	36.00	5.70	7,387.20
Packaging Unit Inside	10	0.32	13.50	8.50	13.00	1,491.75
Packaging Unit Single	1	0.03	9.50	0.50	11.50	54.63
Net single without Packaging	1	0.02	50.00	1.20	1.30	0.00

**More images:**

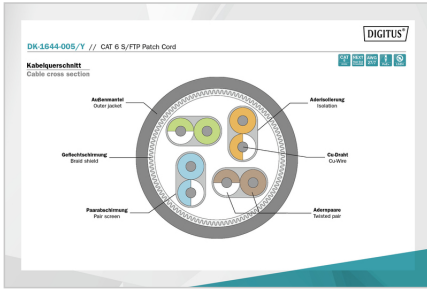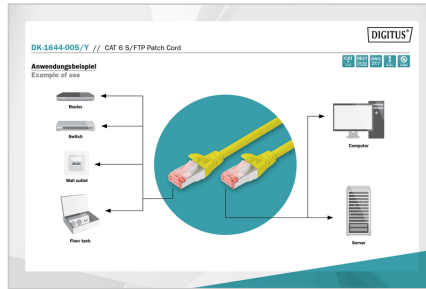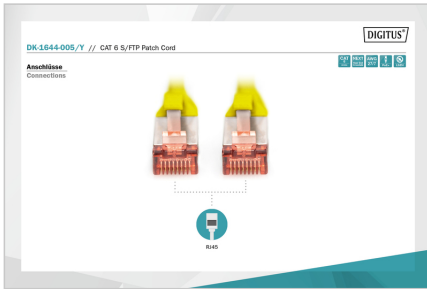

**Safety notes**

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

**EU responsible person**

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH  
 Auf dem Schüffel 3  
 Lüdenscheid, Germany  
<https://www.assmann.com>  
[info@assmann.com](mailto:info@assmann.com)