

DIGITUS® CAT 6 S/FTP patch cable

DK-1644-010

EAN 4016032321620



CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, color grey

Digitus® CAT 6 S-FTP patch cord, Cu, LSZH AWG 27/7, length 1 m, color grey. This patch cord is designed for high-speed data transmission and is compliant with the ISO/IEC 11801 standard. It features a 250 MHz bandwidth and is suitable for use in environments where low smoke and zero halogen (LSZH) are required. The cable is constructed with four twisted pairs of copper conductors, providing excellent performance and reliability. The connectors are made of high-quality plastic and are designed for easy insertion and removal. The overall length of the cable is 1 meter, and it is available in a grey color. The cable is packaged in a standard retail box, and the overall dimensions of the box are 250 mm x 140 mm x 25 mm. The net weight of the cable is 0.04 kg, and the gross weight is 0.05 kg. The cable is made of copper (Cu) and is suitable for use in a wide range of applications, including data centers, offices, and homes. The cable is also suitable for use in environments where low smoke and zero halogen (LSZH) are required. The cable is made of LSZH material, which is a type of plastic that does not contain any halogens and is designed to be self-extinguishing. This makes it a safe choice for use in environments where fire safety is a concern. The cable is also made of copper (Cu), which provides excellent conductivity and is suitable for use in a wide range of applications. The cable is made of LSZH material, which is a type of plastic that does not contain any halogens and is designed to be self-extinguishing. This makes it a safe choice for use in environments where fire safety is a concern. The cable is also made of copper (Cu), which provides excellent conductivity and is suitable for use in a wide range of applications.




- 2 RJ45 (8P8C)
- LSZH (Low Smoke Zero Halogen) material, self-extinguishing
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Conductor material: Copper (Cu)

Attributes

- Configuration: 1:1
- Connector 1: Modular RJ45 (8/8) plug
- Connector 2: Modular RJ45 (8/8) plug
- Packaging: Retail box
- Category: CAT 6
- Shielding: S-FTP, pairs in metal foil and braid shielding
- Length: 1 m
- Color: grey
- Jacket: LSOH
- Slim Version: no
- Structure: 4 x 2 AWG 27/7, twisted pair
- Flat Version: no

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	180	8.60	38.00	29.00	32.00	35,264.00
Packaging Unit Inside	10	0.48	8.70	25.00	30.00	6,525.00
Packaging Unit Single	1	0.05	1.60	14.00	25.00	560.00
Net single without Packaging	1	0.04	100.00	1.20	1.30	0.00

More images:

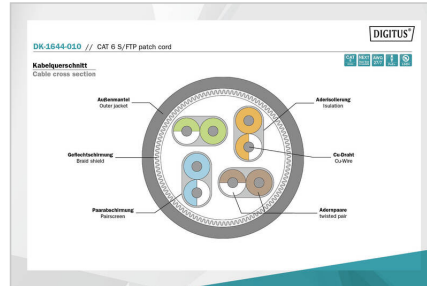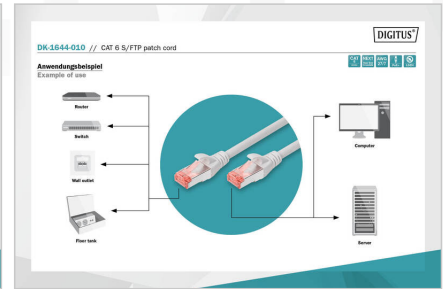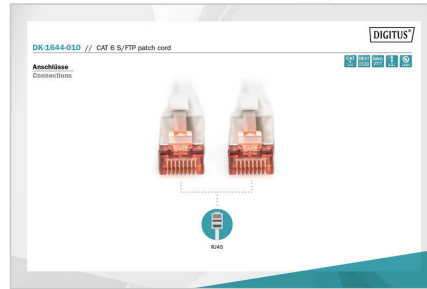

Safety notes

- When plugging and unplugging the cable, only grasp the plug and do not pull directly on the cable.
- Cables must not be kinked sharply or bent at tight angles, as this can damage the inner wires and lead to failures.
- Make sure that the cables are not under tensile load, as this can damage the insulation and the wires inside the cable.
- Ensure that cables are not laid in areas where they can be easily damaged mechanically.
- Cables should not be used in environments with extremely high or very low temperatures. Observe the product information on the maximum operating temperature of the cable
- Check cables regularly for visible damage such as cracks, kinks or signs of wear. Defective cables should be replaced immediately to avoid failures, short circuits or even electric shocks.

EU responsible person

EU based economic operator ensuring the product complies with the required regulations.

ASSMANN Electronic GmbH
 Auf dem Schüffel 3
 Lüdenscheid, Germany
<https://www.assmann.com>
info@assmann.com